



PRELIMINARY CONTENTS

Crane Features	4
Boom Diagram	5
Load Chart: Main Boom & Jib	
LMI Codes	7
Reeving Diagram	
Crane Dimensions	
Chassis Data	
Crane Weights	8
Outrigger Extension	9
Area of Operation	9
Technical Descriptions	10-11
Options	

This document is non-contractual. This document is supplied for reference use only. We are constantly making improvements to our products and reserve the right that specification, equipment, and

The street of th

The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale. Manitex makes no other warranty, expressed or implied. Products and services listed may be trademarks, service marks or trade-names of Manitex International and /or its subsidiaries in the USA and other countries.

All rights are reserved. Manitex® is a registered trademark of Manitex International, Inc. in the USA and many other countries.

Copyright 2013 Manitex Inc. Manitex Inc, Georgetown Texas, 78626







*	Hook block
ĪŢ	Distance from hook to head sheave pin
-	Hook and ball
HYDR	Hydraulics
	Boom elevation angle
THE SECTION OF THE SE	Max. boom length with extension
A STANDAR	Boom with extension retracted
	Boom angle
	Telescoping mode
	Working radius
	Boom length
	Hydraulic actuated boom
	Full power mechanical synchronized
	Boom head / Hook block dimension
	Main boom with auxiliary head
	Tip height







THE CM190 TELESCOPIC CRANE

Maximize Rental Use and Value

The CM190 telescopic crane strikes the perfect balance between the three things customers tell us they care about most in a rental crane: features, cost and ease of use. It's one of the highest-capacity cranes available on a 4x2 chassis, yet it's competitively priced and packed with standard features designed to save time and money.

- Change line speed on the fly and minimize rope stacking with its 2-speed planetary hoist with grooved drum and negative draft flange.
- Minimize maintenance costs with replaceable, self-lubricating boom slider pads.
- Get active and immediate feedback on load with the integrated load-moment indicator system.

Other features include:

- 19-ton capacity @ 5 ft. radius
- 70 ft. 3-section proportional boom
- 80.8 ft. max boom tip height
- Optional 24 ft. fixed jib
- Optional 24 ft./41 ft. telescopic jib
- Wired anti-two block with lockout ATB
- Removable boom rest

USER-FRIENDLY CONTROLS

Dual operator stations are equipped with engine start/stop, foot throttle, signal horn, boom angle indicator, load chart and range diagram.

OUTRIGGER DEPLOYMENT

An audible alarm sounds as outriggers are being deployed, and indicator lights verify when they are fully extended.

LOAD MOMENT INDICATOR

The load-moment indicator sounds a warning or shuts down the machine when lift limitations are about to be exceeded.



INCREASE PROFITABILITY

The versatile CM190, designed to be used with a commercial carrier, helps both owners and operators make the most of their investment.

- Travel to and between jobs at highway speed.
- Ride in comfort with a carrier suspension designed for highway driving.
- Get repairs done quickly and by qualified technicians at commercial truck centers.






AVAILABLE AT:

GUFFRESCOM

GIUFFRE BROS CRANES INC.

Imperial & Metric Units

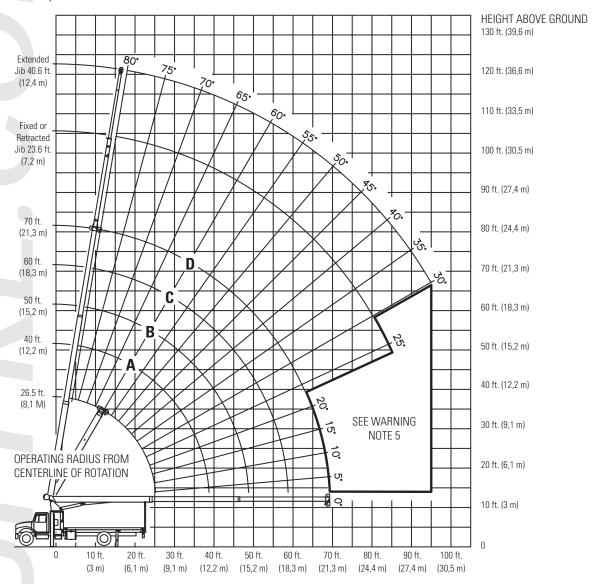

Data published herein is intended as a guide only. Crane operations is subject to machine specific load charts and information.







Lifting Capacities 3-section Boom 26.5 ft. - 70 ft. Jib 23.6 ft. - 40.6 ft.

1 2	0.8 ft. (100%)
-----	-----------	-------



Load Ratings in (lbs.) with Outriggers and Stabilizers Extended								(Ibs.) with Outriggers and Stabilizers Extended Jib Load Ratings in (Ibs.) with Outriggers and Stabilizers Extended and Stabilizers Extended									
LMI Code #1										1	and S	Stabili	zers Extended				
	mod	Boom Length &	2ND								F	ixed Jib		Telesco	- P		
	led Br	Marker			a	BASE	F4						I Code #2		/II Code #3		II Code #4
	Loaded Boom Angle		,	A (lbs.)		B (lbs.)		C (lbs.)		(lbs.)		m00	Jib Length for All Boom Lengths See Warning Note 4 23.6 ft.	m00	Jib Length for All Boom	Loaded Boom Angle	Jib Length for All Boom
(ft.)	<u></u>	26.5 ft.	<u>/</u>	40 ft.	<u>6</u>	50 ft.	6	60 ft.	<u></u>	70 ft.		Loaded Boom Angle	Lengths	ded B Angle	Lengths	ded B Angle	Lengths
5	79	38,000										Loa	See Warning Note 4	Loa	See Warning Note 4	Loa	See Warning Note 4
8	73	27,010	79	24,000							(ft.)	<u>/</u> 0	23.6 ft.	<u>/</u>	23.6 ft.	<u>/</u>	40.6 ft.
10	68	22,330	76	21,100	80	18,000					10						
12	63	18,410	73	18,230	77	16,320	80	13,420			12						
15	55	14,420	69	14,600	74	13,940	77	11,900	80	9,400	15						
20	40	10,350	61	10,540	68	10,600	72	9,810	76	8,180	20	80	4,400	80	4,200		
25	12	7,830	52	8,070	61	8,130	67	8,170	71	7,000	25	78	4,200	78	4,000	80	3,000
30			41	6,400	54	6,470	62	6,510	67	6,050	30	75	4,000	75	3,800	78	2,660
35			28	5,160	47	5,240	56	5,280	62	5,280	35	71	3,600	71	3,380	75	2,380
40					37	4,200	50	4,260	58	4,300	40	68	3,220	68	3,010	72	2,150
45					25	3,360	43	3,420	52	3,460	45	65	2,880	65	2,650	69	1,940
50							35	2,790	47	2,820	50	61	2,580	61	2,340	66	1,770
55							24	2,290	40	2,330	55	57	2,310	57	2,060	63	1,620
60									33	1,930	60	53	2,020	53	1,790	60	1,490
65									23	1,600	65	49	1,690	49	1,460	57	1,380
70											70	45	1,410	45	1,180	54	1,280
75											75	40	1,180	40	950	51	1,190
80											80	34	980	34	750	47	1,030
85											85	27	810	27	570	43	850
90											90					39	700
95											95					34	560
	0	6,650	0	3,820	0	2,700	0	1,960	0	1,370							
														<u> </u>			
	_	150 lbs.		40 lbs.		90 lbs.	-	60 lbs.		40 lbs.	Deductions for stowed fixed jib						
	5	i30 lbs.] 3	50 lbs.	2	280 lbs.	2	40 lbs.	2	00 lbs.			Deductions	tor st	towed telesco	pic Jib	



NOTES:

- All loads rated at 360° pick
- Loads based on crane on outriggers
- All "on outriggers" loads are based on 85% tipping
- Loads above heavy line are based on structural rating
- Loads below heavy line are based on tipping rating

Data published herein is intended as a guide only. Crane operations is subject to machine specific load charts and information.

6





Code	Crane Configuration	Outrigger Configuration	Area of Operation
#1	Main Boom	Fully Extended	372° Non-continuous
#2	Fixed Jib	Fully Extended	372° Non-continuous
#3	Telescopic Jib - Retracted	Fully Extended	372° Non-continuous
#4	Telescopic Jib - Extended	Fully Extended	372° Non-continuous
#5	Personnel lifting platform on main boom	Fully Extended	372° Non-continuous
#6	Personnel lifting platform on fixed jib	Fully Extended	372° Non-continuous
#7	Personnel lifting platform on tele. jib - retracted	Fully Extended	372° Non-continuous
WARN	NING: Lifting personnel from extended jih is not approved		

REEVING DIAGRAM

	ALLOW	WARNING			
1 PART LINE	2 PART LINE	3 PART LINE	4 PART LINE	5 PART LINE	VVAIXIVIIVO
GC OVERHAUL BALL	SHEAVE LOAD BLOCK	SHEAVE LOAD BLOCK	CONBLE OR TRIPLE SHEAVE LOAD BLOCK	Complete Contracts A DOUBLE OR TRIPLE SHEAVE LOAD BLOCK BLOCK	ANTI-TWO-BLOCK SYSTEM MUST BE IN GOOD OPERATING CONDITION BEFORE OPERATING CRANE. REFER TO OWNER'S MANUAL. KEEP AT LEAST 3 WRAPS OF LOAD LINE ON DRUM AT ALL TIMES.
8500 LBS	17000 LBS	25500 LBS	34000 LBS	38000 LBS	9/16" - 6X25 IWRC (3.5:1 S.F.) 29750 LBS. BREAKING STRENGTH
7700 LBS	15400 LBS 23100 LBS		30800 LBS	38000 LBS	9/16" ROT RESISTANT (5.0:1 S.F.) 38800 LBS. BREAKING STRENGTH

Data published herein is intended as a guide only. Crane operations is subject to machine specific load charts and information.








CRANE DIMENSIONS

Imperial & Metric Units

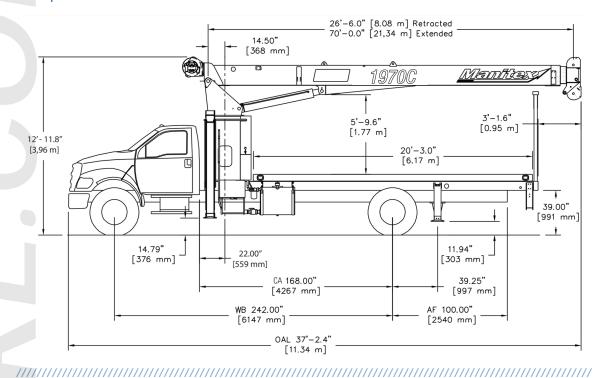

CHASSIS DATA

Wheelbase (WB):	242 in. (6,147 mm)	Minimum truck axle weight - front*	6,000 lbs. (2,722 kg)
Cab to axle (CA):	168 in. (4,267 mm)	Minimum truck axle weight - rear*	4,000 lbs. (1,814 kg)
After frame (AF):	100 in. (2,540 mm)	Nominal frame W:	34 - 35 in. (864 - 889 mm)
Frame section modulus at		Front axle gross weight rating:	12,000 lbs. (5,443 kg)
180°/360° rotation (min.): 15.9 in. ³ - 110	60° rotation (min.): 15.9 in. ³ - 110,000 psi (758,422 kPa)		21,000 lbs. (9,525 kg)

CRANE WEIGHTS

Basic crane weight:	14,625 lbs. (6,634 kg)
Fixed jib 23.6 ft. (7,2 m):	532 lbs. (241 kg)
Telescoping jib: 23.6 ft. (7,2 m) to 40.6 ft. (12,4 m):	823 lbs. (373 kg)
Flatbed 20 ft. (6,1 m):	1,720 lbs. (780 kg)

* Flatbed weight not included in crane weight.

Notes: Additional axles required for federal bridge legal configuration - consult Manitex.

The addition of a front stabilizer is highly recommended and may be required on some installations - consult Manitex.

Data published herein is intended as a guide only. Crane operations is subject to machine specific load charts and information.


8




AVAILABLE AT:

GOUFFRESCOM

Imperial & Metric Units

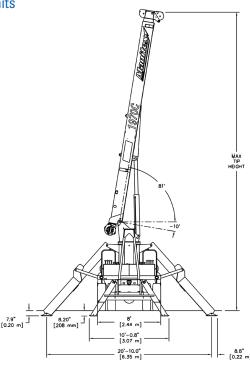

AREA OF OPERATION

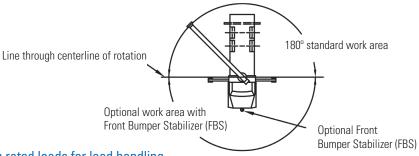

Deductions from rated loads for load handling devices supplied by Manitex

Overhaul ball	See overhaul ball mfgr. nameplate
Load blocks	See block mfgr. nameplate
Hose reel	160 lbs. (73 kg)
Swing-around jib	See load chart

WARNING: Lifting off the main boom point while the jib is erected is not intended or approved.

Data published herein is intended as a guide only. Crane operations is subject to machine specific load charts and information.

9





Boom



Boom length: 3-section 70 ft. (21,3 m) proportional boom

3-sheave quick reeve boom point



Boom max. tip height: 80.8 ft. (24,6 m) Boom min. tip height: 37.7 ft. (11,5 m)



Boom angle (min/max): -10° / 80°

Rotation



Oversized diameter ball bearing swing circle with external gear



Slewing brake: Wet, multi-disc internal brake, spring applied, hydraulic pressure released



Boom rotation: 372° non-continuous Slewing speed: 1.5 - 2 rpm. (nominal)

Outriggers



Outriggers: A-frame

Front Spread

 A-frame, to outer edge of pad: 20.8 ft. (6,4 m)

Rear Spread

 A-frame, to outer edge of pad: 10.1 ft. (3,1 m)

Stowed

 A-frame, to outer edge of pad: 8 ft. (2,4 m)

Outrigger motion alarm



Hoist, Rope and Hook



Maximum theoretical line speed: 300 fpm (91 mpm)



Maximum theoretical bottom-layer line pull: 11,500 lbs. (5,216 kg)



Main winch cable diameter: 9/16 in. (14,3 mm) 6 x 25 EIPS IWRC



Line length: 300 ft. (91,4 m)



Main winch: Bent axis 2-speed hydraulic motor (activated electrically)



Load ball: 5T (4,5 mt) capacity hook with heavy-duty swivel and weight is provided for single line operation.

Hydraulics



6-8 bolt direct mounted PTO and SAE B or output or SAE BB output

3-section gear pump, SAE BB input (standard) Hydraulic reservoir capacity: 70 gal. (265 L)

Pump sections @ 2000 rpm with 100 psi

- Shaft end pump: 32.4 gpm (123 lpm)
- Center pump: 20.6 gpm (78 lpm)
- Cover end pump: 10 gpm (38 lpm)

Operator aids



LMI with crane function cut-offs for overload protection

Graphical display

Anti-two block system - Cable externally routed



AVAILABLE AT:

GIUFFRE BROS CRANES INC.

TECHNICAL DESCRIPTIONS

Control System



Dual operating stations are equipped with four single-lever crane controls arranged in accordance with ANSI B30.5 standards.

Fully proportional control valves

Each station includes:

- Individual control levers for each outrigger and stabilizer
- · Engine start and stop
- Electronic foot throttle
- · Signal horn
- Boom angle indicator
- · Beverage holder
- Load chart with range diagram and mount for removable LMI display

Electrical System

State-of-the-art, weather-resistant components throughout

Hermetically sealed enclosure includes power in relays and circuit status LEDs

Mounting System

Pedestal sub-frame and stabilizers are mounted to chassis by threaded rods and clamp plates

Sub-frame: Torsion resistant, rigid 4-plate design mounted under crane full length of truck frame

Rear under-ride protection: Standard on factory mounted cranes.

Boom rest: Heavy-duty fabrication, easily removed for unencumbered loading and unloading of crane deck.

Options

Tool Boxes & Bulkhead

24 in. L x 20 in. W x 18 in. H - Steel (610 mm L x 508 mm W x 457 mm H)

48 in. L x 24 in. W x 24 in. H - Aluminum (1219 mm L x 610 mm W x 610 mm H)

Bulkhead: 24 in. (610 mm)

Options

Jib



1-section fixed jib 23.6 ft. (7,2 m)

2-section telescopic jib 23.6 ft (7,2 m) - 40.6 ft. (12,4 m)



Max. boom tip height with extension: 121.2 ft. (36,9 m) from ground

Max. boom tip height with extension retracted: 104.5 ft. (31,9 m) from ground

Hoist, Rope and Hook



Load block: 1-sheave

lydraulics



3-section vane pump, SAE B input

Hydraulic oil cooler

Hose reel - boom mounted

FBS - Front Bumper Stabilizer

2-Person Baskets



2-person man basket - Aluminum or steel - consult Manitex

- Non-rotating (600 lbs. cap.)
- Rotating (1,000 lbs. cap.) main boom only

2-Person Baskets



4-Function radio remote crane control system

• 900 Mhz

Bed Options


20 ft. (6,1 m) Wood or steel 20 ft. (6,1 m) Steel heavy hauler

In order to ensure continuous improvement, Manitex reserves the right to change design and specifications without notice.

1





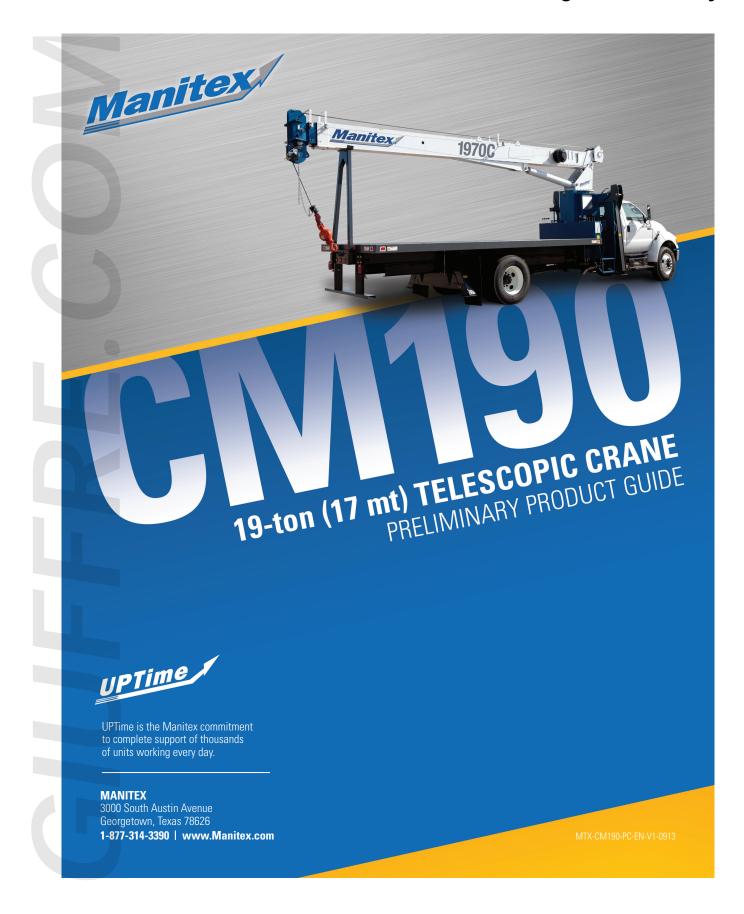



AVAILABLE AT:

GUFFRESCOM

GIUFFRE BROS CRANES INC.