



TC5013A-5




Final product specification shall be in accordance with purchase order or sales contract only

TC5013A-5

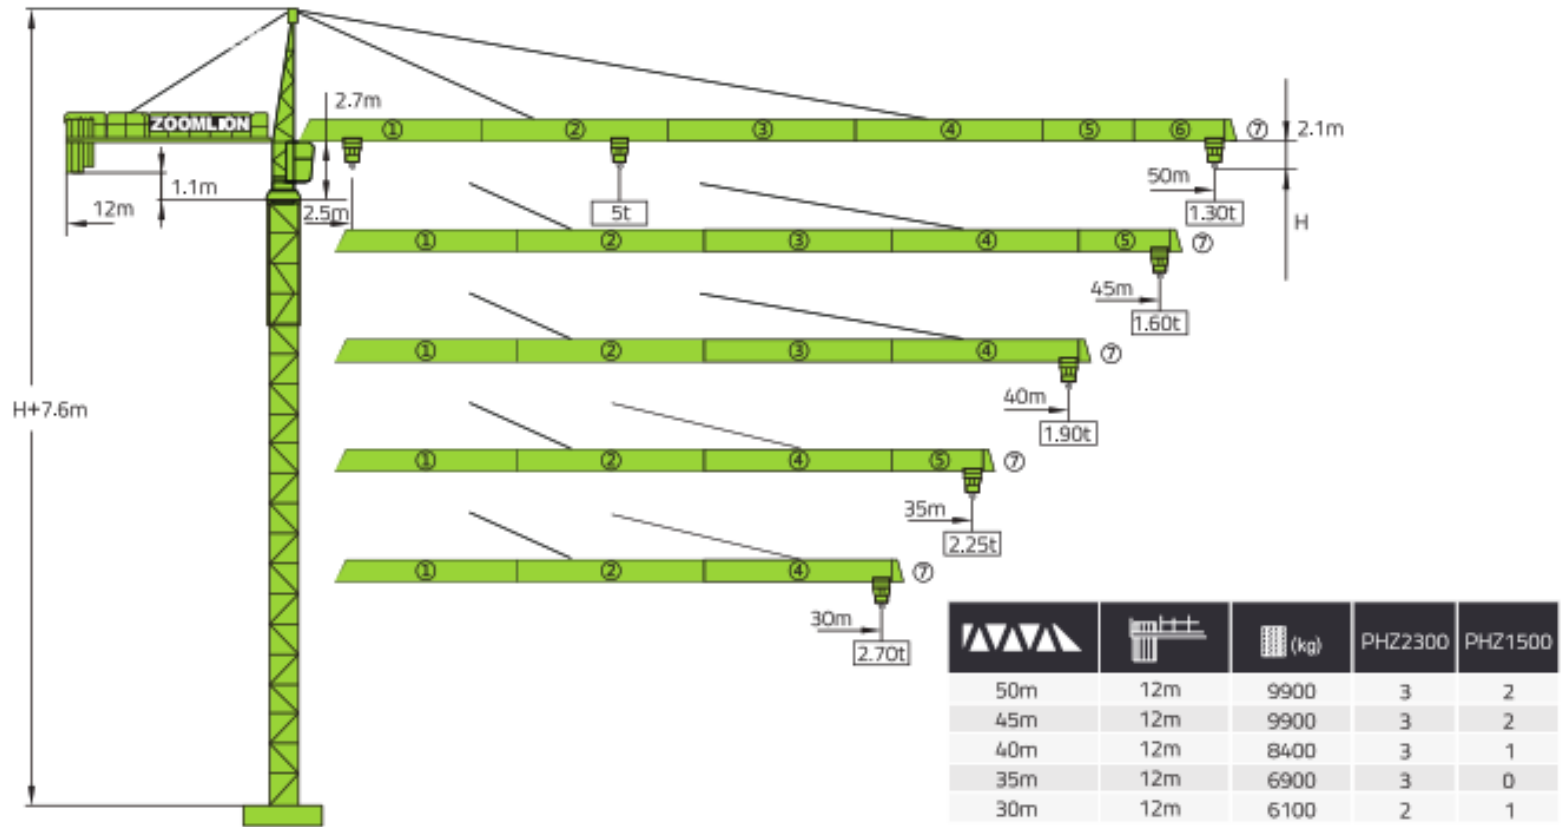

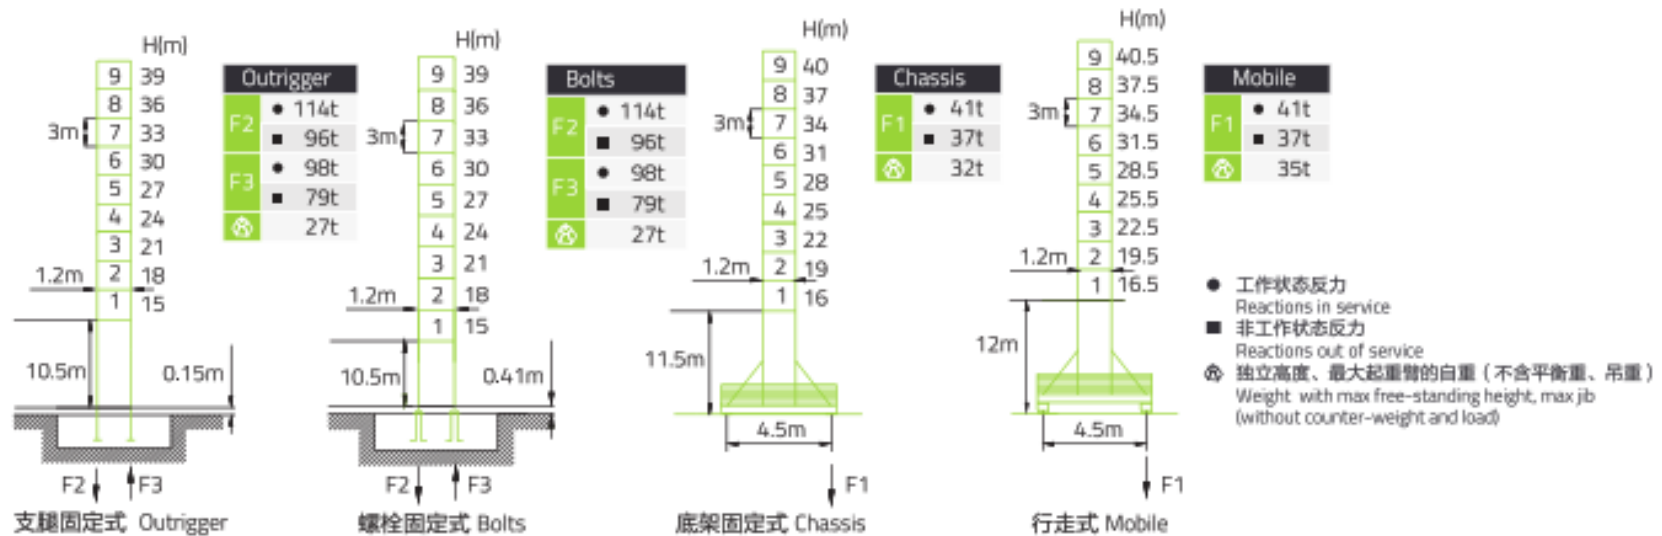


塔身 Masts / 反力 Reactions / TC5013A-5G

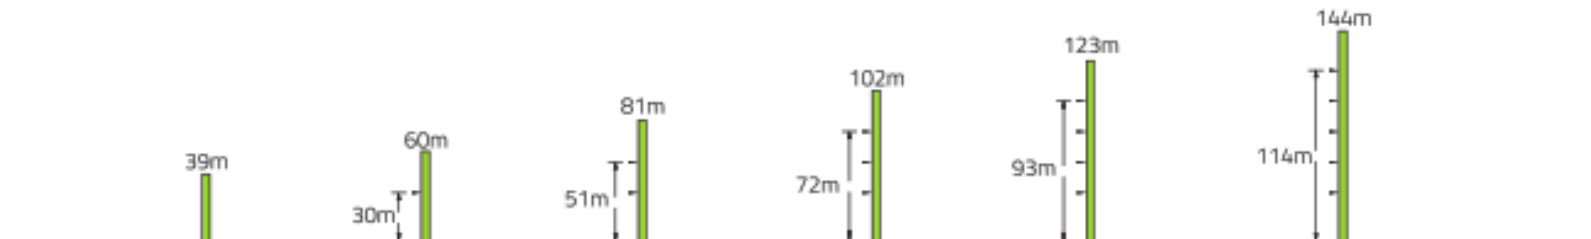

附着 Anchorages / TC5013A-5G



■ 传动机构 Mechanisms / TC5013A-5G

配置 Configuration		bd			bd			kW		
		I	II	III	I	II	III			
 起升 Hoisting	H18SP13-400 (440V/60Hz)	m/min	11.64	39	78	5.82	19.5	39	6/21.6/21.6	400m ① (6 layers)
		t	2.5	2.5	1.25	5	5	2.5		
 回转 Slewing	HR55.130 (440V/60Hz)	r/min	0~0.72						6.6	① 超出咨询我们 Consult us if overtop
 变幅 Trolleying	BE24B (440V/60Hz)	m/min	48/24						2.88/1.8	
	440v(±10%)60Hz	31.08kW								