










## Technical Information

Dimension		LxWxH	4150 x 1100 x 1960 mm
Stab. Area			4160 x 4160 mm

		Kg
Crane & Options Weights		SPX527CDH 3600
		/
		3T-D8 30
		PP400-4D 30 PP220-4D
		JIB800G 55 JIB600.2H 210
		MR800.4 230 JIB301GR 200 JIB302GR 210

SPX527CDH	Diesel Engine	KUBOTA D11 Ø5-E3B	18.7 kW 25 Hp
-----------	---------------	----------------------	------------------

Speed		2 km/h
Gradeability		25°

### Electric Power Pack



4 kW - 3F  
400 VAC 50 Hz  
4 kW - 1F  
110 VAC 60 Hz

### Boom Length

3.4 - 12.1 m 40 sec.

### Working Angle

-2° / 80° 35 sec.

### Rotation

360° / 1.0 rpm

### Max. Track Load




0.53 kg/cm<sup>2</sup>


### Max. Outrigger Load



2700 kg

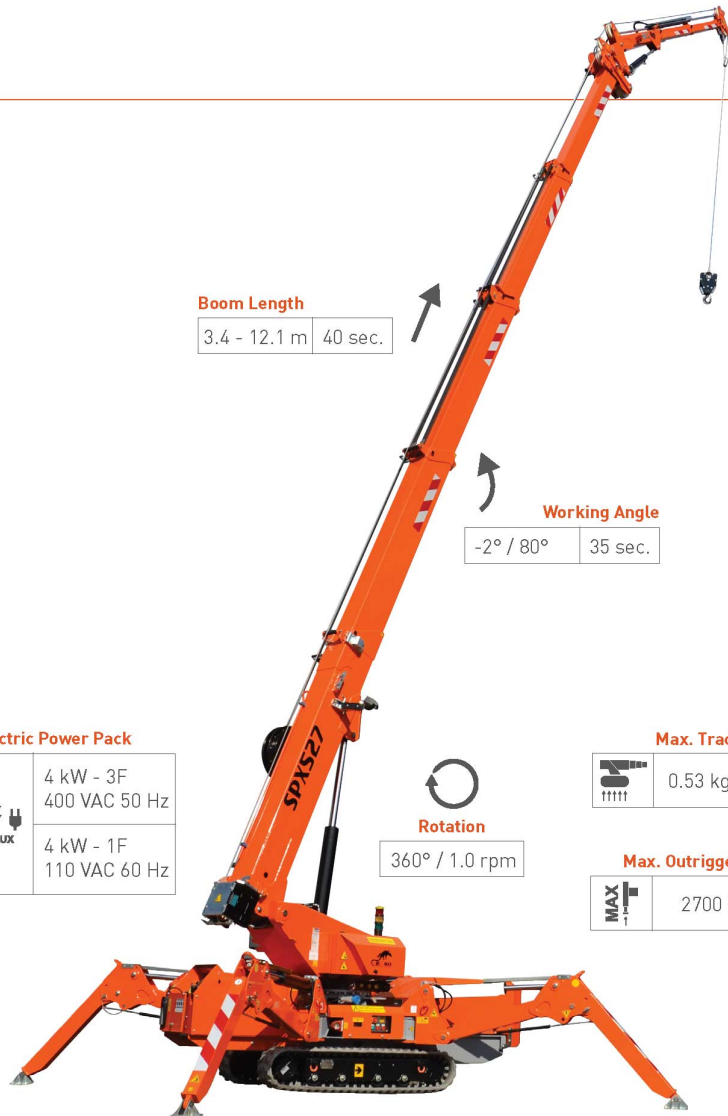

## Crane Options

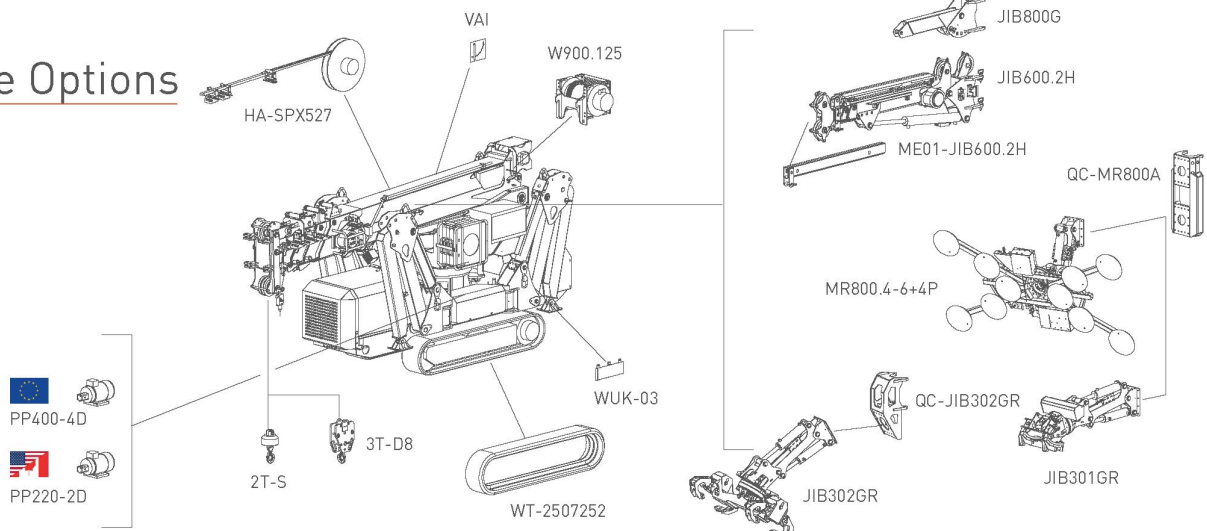

A2B

BPI

CCI

DTC

EXT

GSC

LMI

P&C

PPA

SCI

TH

VW

RCD

2SW

2ST

Whether it is a small job or a big construction site, the SPX527 is the mini crane par excellence:  
Reliable and safe, it adapts to any kind of job.




## Winch & Fall Stages



Main Winch

900 kg  
60 m - Ø 8 mm  
40,6 m/min.

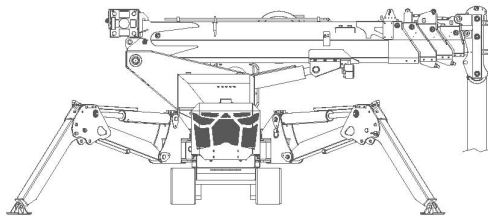


Max. Capacity	Line	Metres
max 2700 kg	3	-18 m
max 1800 kg	2	-26 m
max 800 kg	1	-53 m





## Load Chart

000 Capacity with jib  
(000) Pick&Carry

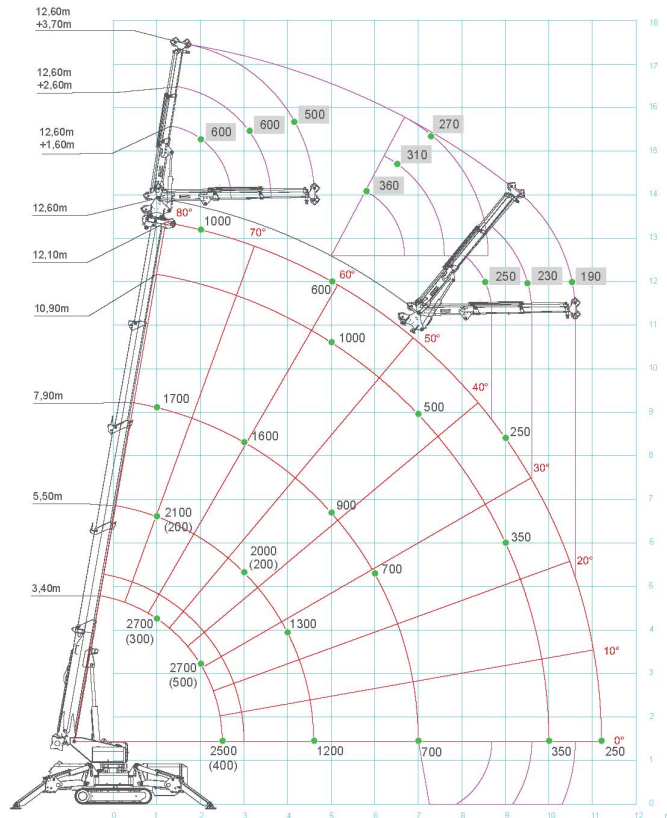

## Dimensions

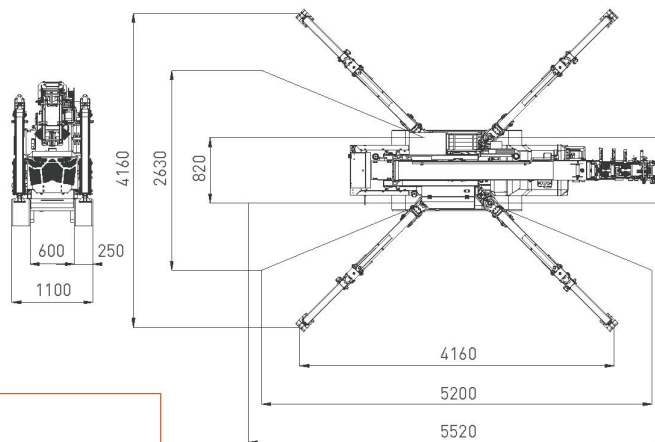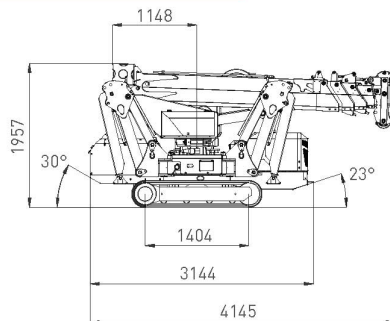

## Tools Configurations

JIB800G	
max	800 kg
max	800 kg @ 13.5m
max	250 kg @ 11 m

JIB600.2H*	
max	600 kg
max	500 kg @ 17.5 m
max	190 kg @ 10.5 m

MR800.4-6+4P	
max	800 kg
max	400 kg @ 14 m
max	150 kg @ 9 m

JIB301GR	
max	300 kg
max	300 kg @ 15 m
max	300 kg @ 8 m

JIB302GR	
max	300 kg
max	300 kg @ 15 m
max	300 kg @ 8 m

\* Manual extension (stinger) available