



TADANO


GR-1000XLL-4

100 Ton (90.7 Metric Ton) Capacity

Form NO. GR-1000-4-00102/US-03

HYDRAULIC ROUGH TERRAIN CRANE

DIMENSIONS

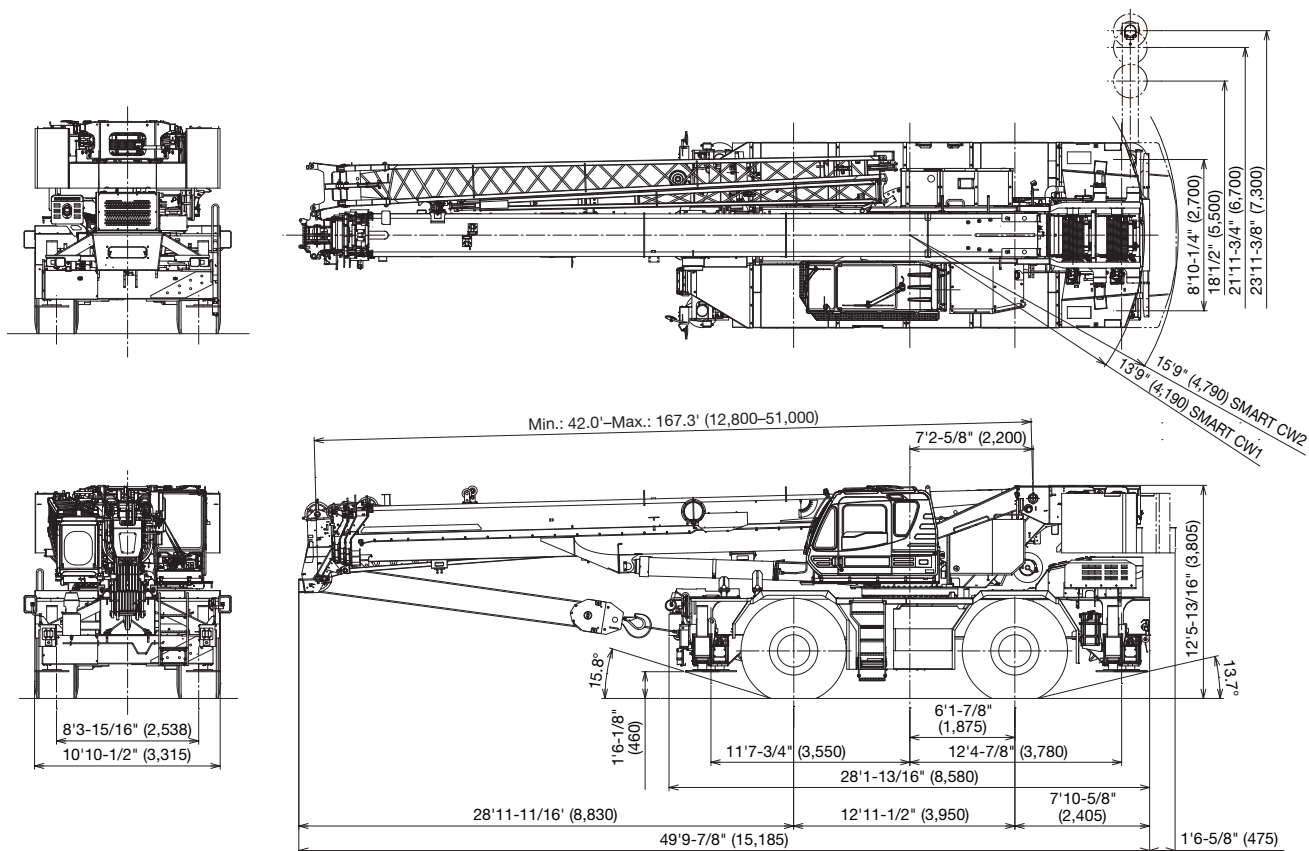

Note: Dimension is with boom angle at -1.5 degree.
() Reference dimensions in mm.

GENERAL DIMENSIONS

	Feet	Meters
Turning radius (29.5-25 Tires)		
4 wheel steer	22' 4"	6.8
2 wheel steer	35' 9-3/32"	10.9

	Feet	Meters
Overall length	approx. 49' 9-7/8"	15.185
Overall width	approx. 10' 10-1/2"	3.315
Overall height	approx. 12' 5-13/16"	3.805

CRANE SPECIFICATIONS

BOOM

5 section full power synchronized telescoping boom, 42.0'–167.3' (12.8 m–51.0 m), of round box construction with 7 sheaves, 17-5/16" (0.44 m) root diameter, at boom head.

The synchronization system consists of 2 telescope cylinders, an extension cable and retraction cable. Hydraulic cylinder fitted with holding valve. 2 easily removable wire rope guards, rope dead end provided on both sides of boom head. Boom telescope sections are supported by wear pads both vertically and horizontally. Extension speed 125.3' in 170 seconds.

BOOM ELEVATION - By a double acting hydraulic cylinder with holding valve. Elevation -1.5°-80.5°, combination controls for hand or foot operation. Boom angle indicator. Automatic speed reduction and slow stop function. Boom raising speed 20° to 60° in 46 seconds.

JIB - 2 stage bi-fold lattice type, 3.5°, 25° or 45° offset (tilt type). Single sheave, 15-5/8" (0.396 m) root diameter, at the head of both jib sections. Stored alongside base boom section. Jib length is 33.2' (10.1 m) or 58.1' (17.7 m). Assistant cylinders for mounting and stowing, controlled at right side of superstructure. Self stowing jib mounting pins.

AUXILIARY LIFTING SHEAVE (SINGLE TOP)

Single sheave, 15-5/8" (0.396 m) root diameter. Mounted to main boom head for single line work (stowable).

ANTI-TWO BLOCK - Pendant type over-winding cut out device with audio-visual (FAILURE lamp/BUZZER) warning system.

SLEWING

Hydraulic axial piston motor through planetary slewing speed reducer. Continuous 360° full circle slewing on ball bearing turn table at 1.5 min⁻¹ {rpm}. Equipped with manually locked/released slewing brake. A 360° positive slewing lock for pick and carry and travel modes, manually engaged in cab. Twin slewing system: Free slewing or lock slewing controlled by selector switch on front console.

WINCH

MAIN WINCH - Variable speed type with grooved drum driven by hydraulic axial piston motor through speed reducer. Power load lowering and raising. Equipped with automatic brake (neutral brake) and counterbalance valve. Controlled independently of auxiliary winch. Equipped with cable follower and drum rotation indicator.

DRUM - Grooved 14-1/4" (0.362 m) root diameter x 26-13/16" (0.681 m) wide. Wire rope: 935' of 3/4" diameter rope (285 m of 19 mm). Drum capacity: 1135' (346 m) 7 layers. Maximum single line pull: 1st layer 20,000 lbs (9,090 kg). Maximum permissible line pull wire strength: 14,600 lbs (6,600 kg).

AUXILIARY WINCH - Variable speed type with grooved drum driven by hydraulic axial piston motor through speed reducer. Power load lowering and raising. Equipped with automatic brake (neutral brake) and counterbalance valve. Controlled independently of main winch. Equipped with cable follower and drum rotation indicator.

DRUM - Grooved 14-1/4" (0.362 m) root diameter x 26-13/16" (0.681 m) wide. Wire rope: 482' of 3/4" diameter rope (147 m of 19 mm). Drum capacity: 1135' (346 m) 7 layers. Maximum single line pull: 1st layer 20,000 lbs (9,090 kg). Maximum permissible line pull wire strength: 14,600 lbs (6,600 kg).

WIRE ROPE - Non-rotating 3/4" (19 mm) P·S (19) + 39 x P·7 Breaking Strength 72,800 lbs (33,000 kg)

HOOK BLOCKS

100 ton (90.7 metric ton)-8 sheaves with swivel hook and safety latch, for 3/4" (19 mm) wire rope.

7.3 ton (6.6 metric ton) - Weighted hook with swivel and safety latch, for 3/4" (19 mm) wire rope.

COUNTERWEIGHT

Self-removable counterweight 24,700 lbs (11,200 kg)

HYDRAULIC SYSTEM

PUMPS - 2 variable piston pumps for crane functions. Tandem gear pump for steering slewing and other hydraulic systems. Powered by carrier engine. Pump disconnect for crane is engaged/disengaged by rotary switch from operator's cab.

CONTROL VALVES - Multiple valves actuated by pilot pressure with integral pressure relief valves.

RESERVOIR - 210 gallon (795 lit.) capacity. External sight level gauge.

FILTRATION - BETA10=10 return filter, full flow with bypass protection, located inside of hydraulic reservoir. Accessible for easy replacement.

OIL COOLER - Air cooled fan type.

CAB AND CONTROLS

Both crane and drive operations can be performed from one cab mounted on rotating superstructure.

20° tilt, Left side, 1 man type, steel construction with sliding door access and safety glass windows opening at side. Door window is powered control. Windshield glass window and roof glass window are shatter-resistant. Tilt-telescoping steering wheel. Adjustable control lever stands for slewing, boom elevating, boom telescoping, auxiliary winch and main winch. Control lever stands can change neutral positions and tilt for easy access to cab. 3 way adjustable operator's seat with high back, headrest and armrest. Engine throttle knob. Foot operated controls: boom elevating boom telescoping, service brake and engine throttle. Hot water cab heater and air conditioning.

Dash-mounted Instrument panel, Multi Function Display, Starter switch (engine start/stop), 12 V power outlet, USB port, drive selector switch, parking brake switch, steering mode select switch, power window switch, pump engaged/disengaged switch, slewing brake switch, telescoping/auxiliary winch select switch, outrigger controls, free slewing/lock slewing selector switch, air conditioning control switch.

Instruments panel - Torque converter oil temperature, engine water temperature, air pressure, fuel, speedometer, tachometer, hour meter and odometer/tripmeter.

Multi Function Display - DEF level gauge, Fuel consumption monitor.

Tadano electronic LOAD MOMENT INDICATOR system (AML-E2) including:

- Control lever lockout function with audible and visual pre-warning
- Number of parts of line
- Boom position indicator
- Outrigger state indicator
- Slewing angle
- Boom angle / boom length / jib offset angle / jib length / load radius / rated lifting capacities / actual loads read out
- Potential lifting height
- Ratio of actual load moment to rated load moment indication
- Automatic Speed reduction and slow stop function on boom elevation and slewing
- Working condition register switch
- Load radius / boom angle / tip height / slewing range preset function
- External warning lamp
- Tare function
- Main Hydraulic oil pressure
- Fuel consumption monitor

- Main winch / auxiliary winch select
- Drum rotation indicator (audible and visible type) main and auxiliary winch
- On rubber indicator

TADANO AML-E2 monitors outrigger extended length and automatically programs the corresponding "RATED LIFTING CAPACITIES" table.

Operator's right hand console includes transmission gear selector, slewing lock lever and sight level bubble.

Upper console includes, roof washer and wiper switch, emergency outrigger set up key switch, jib equipped / removed select switch, high speed winch (main / aux) switch, Cab tilt switch, Pump disconnect enable switch and boom emergency telescoping switch (2nd and 3rd-top).

NOTE: Each crane motion speed is based on unladen conditions.

CARRIER SPECIFICATIONS

TYPE - Rear engine, left hand steering, driving axle 2-way selected type by manual switch, 4 x 2 front drive, 4 x 4 front and rear drive.

FRAME - High tensile steel, all welded mono-box construction.

TRANSMISSION - Electronically controlled full automatic transmission. Torque converter driving full powershift with driving axle selector. 6 forward and 2 reverse speeds, constant mesh.

- 3 speeds - high range - 2 wheel drive; 4 wheel drive
- 3 speeds - low range - 4 wheel drive

TRAVEL SPEED - 22 mph (36 km/h)

GRADEABILITY (tanθ) - 84% (at stall), 57%*

* Machine should be operated within the limit of engine crankcase design (30°: Cummins B6.7)

AXLE - Front: Full floating type, steering and driving axle with planetary reduction. Rear: Full floating type, steering and driving axle with planetary reduction and non-spin rear differential.

STEERING - Hydraulic power steering controlled by steering wheel. Four steering modes available: 2 wheel front, 2 wheel rear, 4 wheel coordinated and 4 wheel crab.

SUSPENSION - Front: Rigid mounted to frame. Rear: Pivot mounted with hydraulic lockout device.

ENGINE

Model	Cummins B6.7
Type	Direct injection diesel
No. of cylinders	6
Combustion	4 cycle, turbo charged and after cooled
BoreXStroke, in. (mm)	4.212 X 4.882 (107 X 124)
Displacement, cu. in (liters)	409 (6.7)
Air inlet heater	24 volt preheat
Air cleaner	Dry type, replaceable element
Oil filter	Full flow with replaceable element
Fuel filter	Full flow with replaceable element
Fuel tank, gal. (liters)	79.2 (300), right side of carrier
Cooling	Liquid pressurized, recirculating by-pass

BRAKE SYSTEMS - Service: Air over hydraulic disc brakes on all 4 wheels. Parking / Emergency: Spring applied-air released brake acting on input shaft of front axle. Auxiliary: Electro-pneumatic operated exhaust brake.

TIRES - 29.5-25 36PR (OR) Air pressure: 68 psi (470 kPa)
29.5-25 40PR (OR) Air pressure: 67 psi (465 kPa)

OUTRIGGERS - Four hydraulic, beam and jack outriggers. Vertical jack cylinders equipped with integral holding valve. Each outrigger beam and jack is controlled independently from cab. Beams extend to 23' 11-3/8" (7.3 m) center-line and retract to within 10' 10-1/2" (3.315 m) overall width with floats. Outrigger jack floats are attached thus eliminating the need of manually attaching and detaching them. Controls and sight bubble located in superstructure cab. Four outrigger extension lengths are provided with corresponding "RATED LIFTING CAPACITIES" for crane duty in confined areas.

Min. Extension 8' 10-1/4" (2.7 m) center to center
Mid. Extension 18' 1/2" (5.5 m) center to center
Mid. Extension 21' 11-3/4" (6.7 m) center to center
Max. Extension 23' 11-3/8" (7.3 m) center to center

Float size (Diameter) 1' 11- 5/8" (0.6 m)

Radiator	Fin and tube core, thermostat controlled
Fan, in. (mm)	Suction type, 9-blade, 28 (711) dia.
Starting	24 volt
Charging	24 volt system, negative ground
Battery	2-120 amp. Hour
Compressor, air, CFM (l /min)	17.0 CFM (481) at 2,400 rpm
Output, Max. HP (kW)	Gross 280 (209) at 2,200 rpm
Torque, Max. ft-lb (Nm)	850 (1,152) at 1,500 rpm
Capacity, gal. (liters)	
Cooling water	2.7 (10)
Lubrication	4.0 (15)
Fuel	79.2 (300)
DEF/AdBlue	15.0 (57)

STANDARD EQUIPMENT

- 5 section full power partially synchronized boom
42.0'-167.3' (12.8 m-51.0 m)
- 33.2' or 58.1' (10.1 m or 17.7 m) bi-fold lattice jib (tilt type)
with 3.5°, 25° or 45° pinned offsets and self storing pins.
- Quick reeving type bi-fold jib
- Anti-Two block device (overwind cutout)
- Winch drum camera with light
- LED work lights
- Variable speed main winch with grooved drum, cable follower, drum
rotation indicator (audible, visible and thumper type) and 935' of 3/4" cable.
- Variable speed auxiliary winch with grooved drum, cable follower, drum
rotation indicator (audible, visible and thumper type) and 482' of 3/4" cable.
- Auxiliary lifting sheave (single top) stowable
- 2-speed winch
- 100 ton (90.7 metric ton) hook block - 8 sheave with swivel hook
and safety latch for 3/4" (19 mm) wire rope
- 7.3 ton (6.6 metric ton) hook with swivel
- Tadano twin slewing system and 360° positive slewing lock
- Positive control
- Hydraulic oil cooler
- 3 way adjustable cloth seat with armrests, high back and seat belt
- Tilt-telescoping steering wheel
- Tinted safety glass and sun visor
- Front windshield wiper and washer
- Roof window wiper and washer
- Power window (cab door)
- 12V power outlet
- Ashtray
- Cab floor mat
- Pump disconnect in operator's cab
- Air conditioner (hot water heater and cooler)
- Full instrumentation package
- Self centering finger control levers with pilot control
- Control pedals for boom elevating and boom telescoping
- Low oil pressure / high water temp. warning device (visual)
- Air cleaner dust indicator
- Cup holder
- Battery disconnect
- USB port
- 20° tilt cab
- Wind speed indicator
- Emergency steering system
- Tadano electronic load moment indicator system (AML-E2)
- Boom angle indicator
- Outrigger extension length detector
- Electronic crane monitoring system
- Rear view camera
- Right front view camera
- Fenders
- Air dryer
- Complete highway light package
- Towing hooks-Front and rear
- Hook block tie down (front bumper)
- Weighted hook storage compartment
- Halogen head lamp
- Independently controlled outriggers
- Four outrigger extension positions
- Self-storing outrigger pads
- Electronic controlled automatic transmission driven by torque converter
- 4 X 4 X 4 drive / steer
- Non-spin rear differential
- Automatic rear axle oscillation lockout system
- 29.5-25 36 PR tires
- 29.5-25 40 PR tires
- Disc brakes
- Water separator with filter (high filtration)
- Back-up alarm
- 24 volt electric system
- Tool storage compartment
- Tire inflation kit
- Cummins B6.7 turbo charged
after cooled engine (280 HP) with exhaust brake
- Engine over-run alarm
- Lifting eyes
- Telematics (machine data logging and monitoring system)
with HELLO-NET via internet (availability depends on countries)
- Fuel consumption monitor
- Eco mode system
- Self-removable counterweight
- Radiator cover
- Clearance sonar (Rear side)
- Automatic pump disconnect
- Over unwinding prevention

HOISTING PERFORMANCE

LINE SPEEDS AND PULLS

Layer	Main or auxiliary hoist - 14'-1/4" (0.362 m) drum							
	Line speeds ¹				Line pulls Available ²			
	Low		High		Low		High	
	F.P.M	m/min	F.P.M	m/min	Lbs.	kgf	Lbs.	kgf
1st	278	84	387	118	20,000	9,090	14,400	6,520
2nd	302	92	421	128	18,100	8,230	13,000	5,900
3rd	327	99	456	139	16,600	7,520	11,900	5,390
4th	352	107	491	149	15,300	6,920	10,900	4,960
5th	377	115	526	160	14,100	6,410	10,100	4,600
6th	402	122	560	170	13,200	5,970	9,400	4,280
7th ³	427	130	595	181	12,300	5,590	8,800	4,010

- Maximum permissible line pull wire strength
14,600 lbs (6,600 kg).

¹ Line speeds based only on hook block, not loaded.
² Developed by machinery with each layer of wire rope, but not based
on rope strength or other limitation in machinery or equipment.
³ Seventh layer of wire rope are not recommended
for hoisting operations.

DRUM WIRE ROPE CAPACITIES


Wire rope layer	Main and auxiliary drum grooved lagging 3/4" (19 mm) wire rope			
	Rope per layer m		Total wire rope m	
	Feet	Meters	Feet	Meters
1	128.0	39.0	128.0	39.0
2	139.4	42.5	267.4	81.5
3	150.9	46.0	418.3	127.5
4	162.1	49.4	580.4	176.9
5	173.9	53.0	754.3	229.9
6	185.4	56.5	939.6	286.4
7	196.9	60.0	1,136.5	346.4

DRUM DIMENSIONS

	Inch	mm
Root diameter	14-1/4"	362
Length Flange	26-13/16"	681
diameter	25-7/8"	657


GR-1000XLL-4 WORKING RANGE CHART

SMART CW1 360° ROTATION

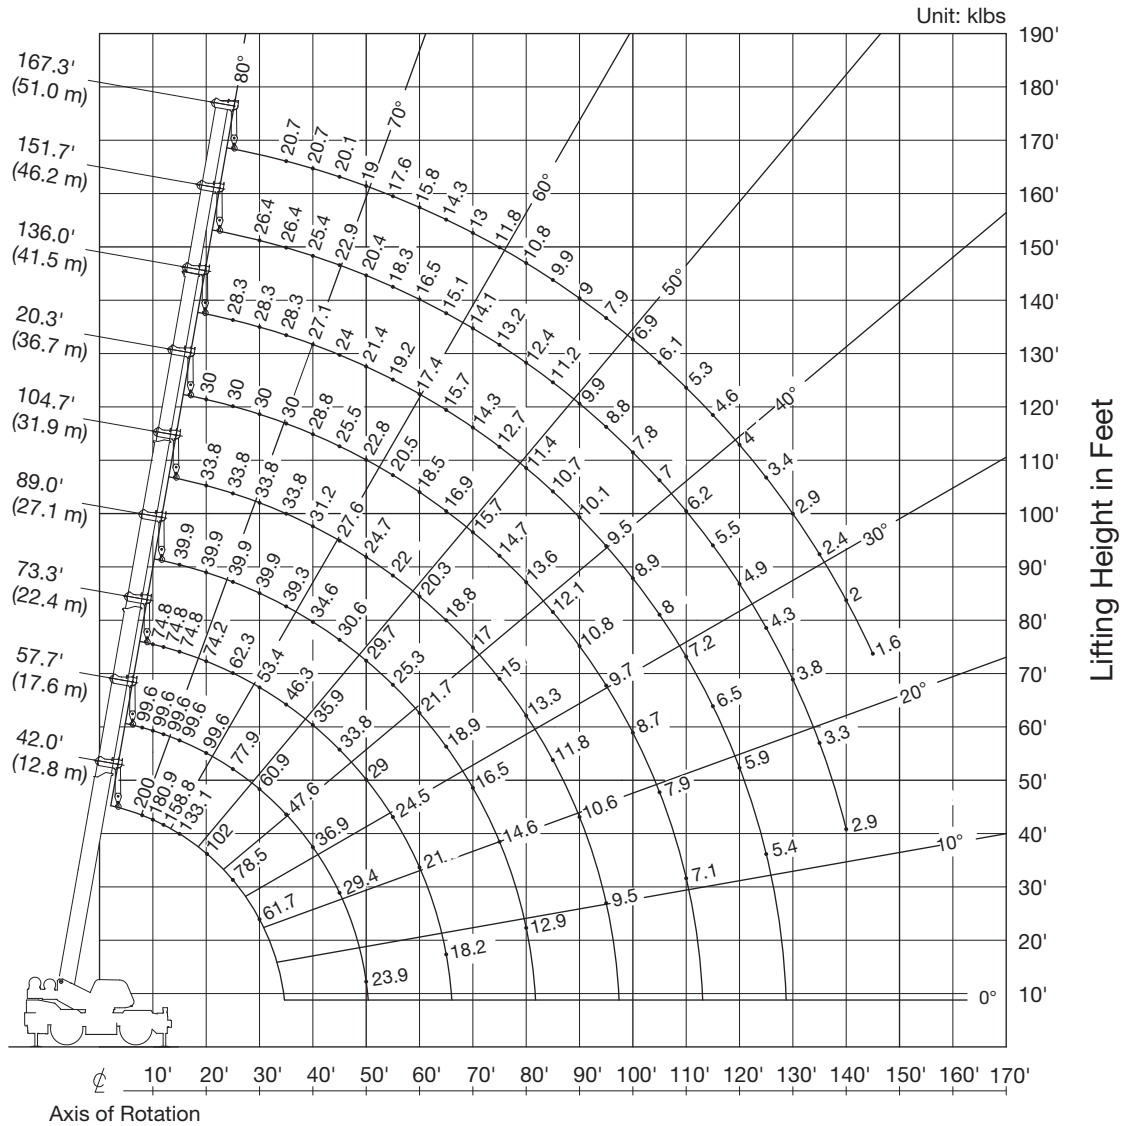


Load Radius from Axis of Rotation in Feet

BOOM




SINGLE TOP




NOTE: Boom geometry shown is for unloaded condition and machine standing level on firm supporting surface. Boom deflection and subsequent radius and boom angle change must be accounted for when applying load to hook. When boom length is same as telescoping mode 1 and 2, it show large load.

GR-1000XLL-4 WORKING RANGE CHART


SMART CW2 360° ROTATION

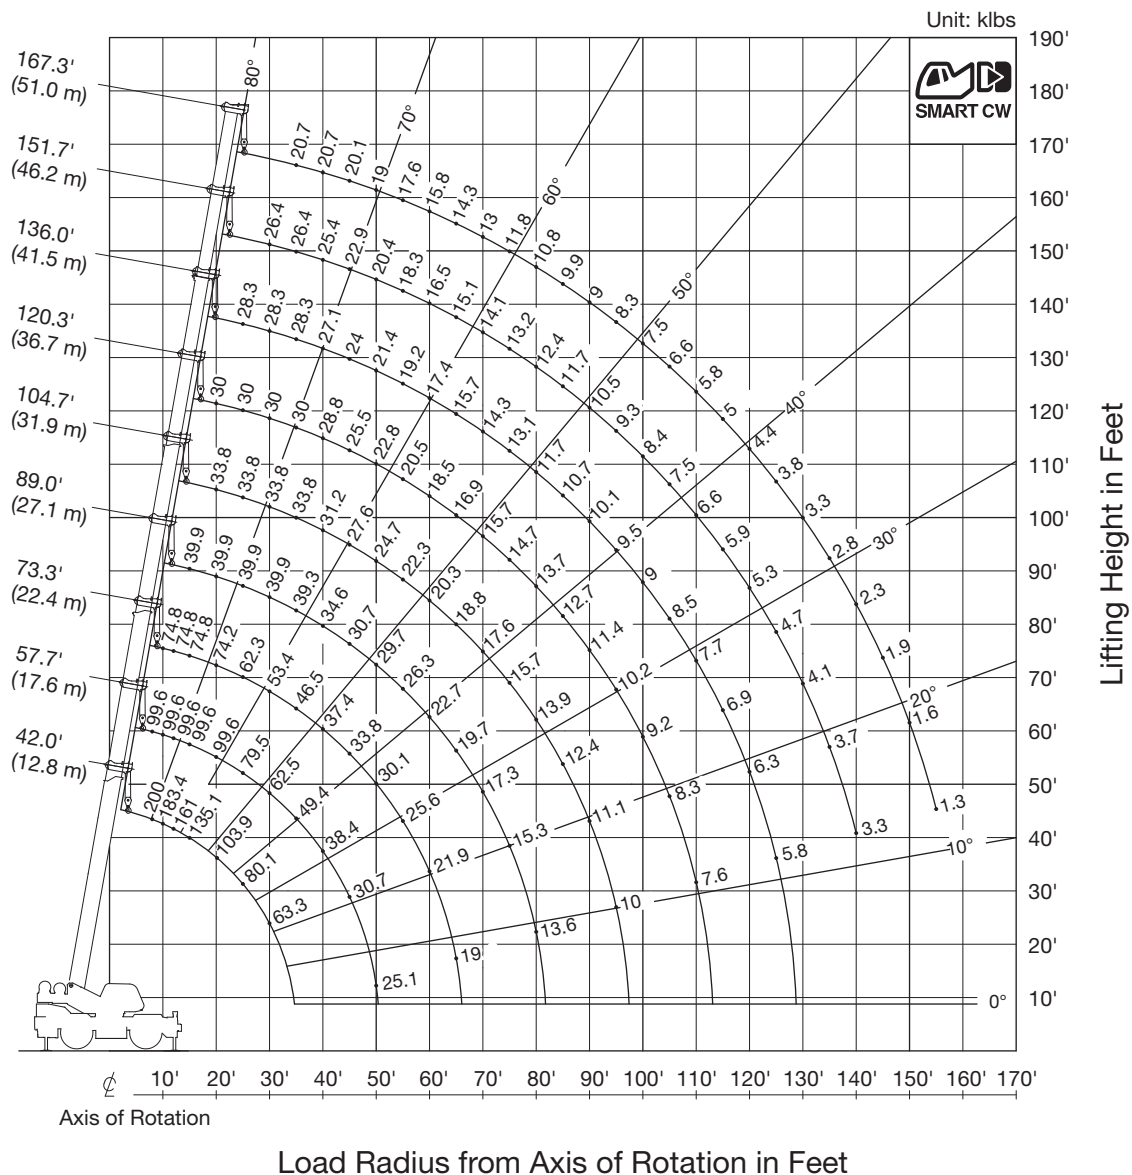

BOOM




SINGLE TOP




NOTE: Boom geometry shown is for unloaded condition and machine standing level on firm supporting surface. Boom deflection and subsequent radius and boom angle change must be accounted for when applying load to hook. When boom length is same as telescoping mode 1 and 2, it show large load.

GR-1000XLL-4 WORKING RANGE CHART


SMART CW2 SMART CHART

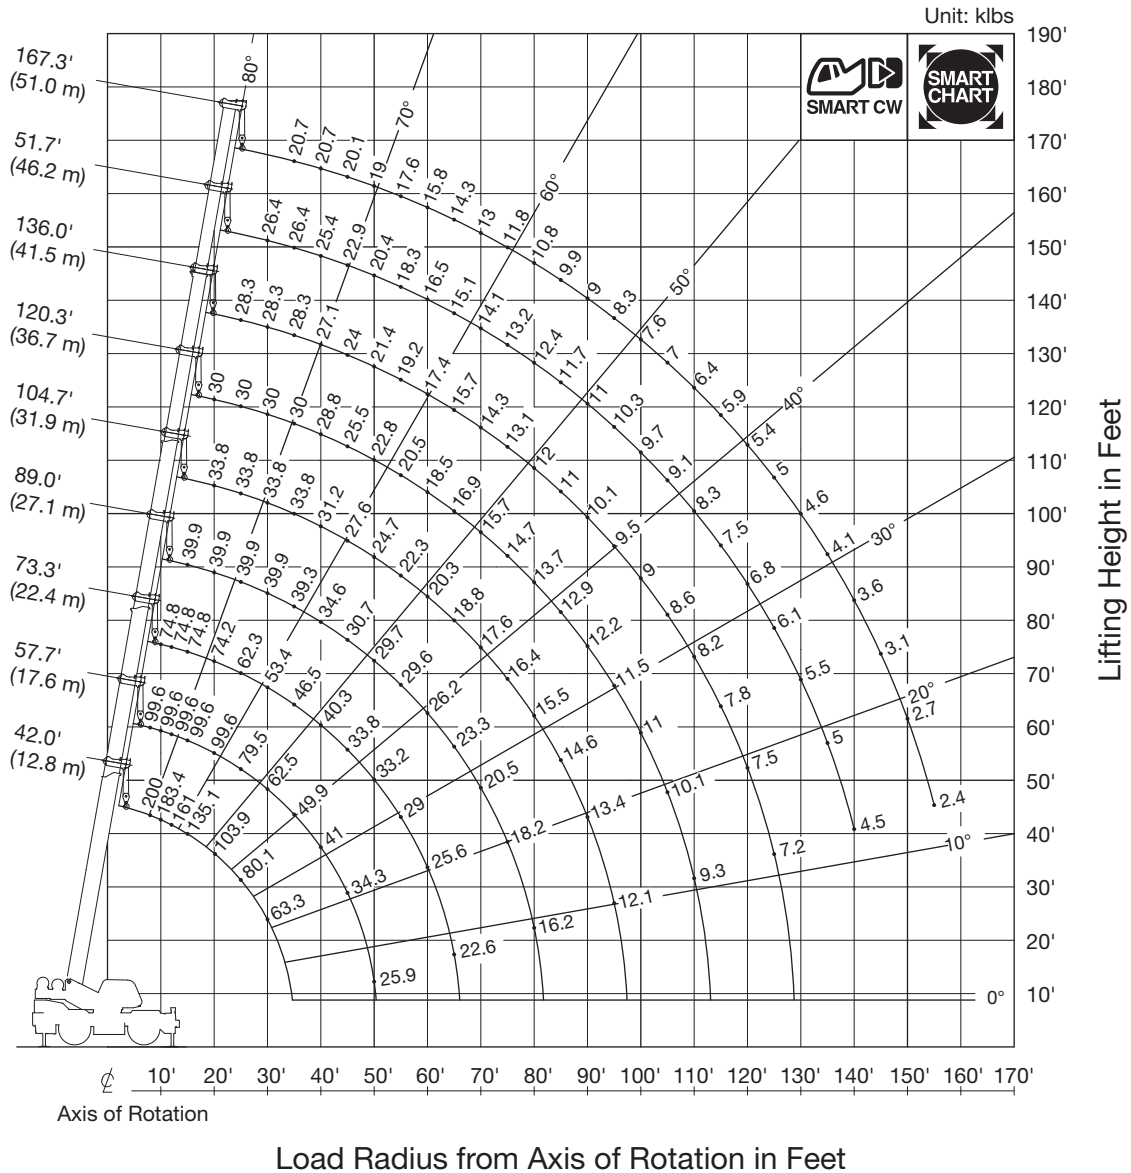

BOOM




SINGLE TOP




NOTE: Boom geometry shown is for unloaded condition and machine standing level on firm supporting surface. Boom deflection and subsequent radius and boom angle change must be accounted for when applying load to hook. When boom length is same as telescoping mode 1 and 2, it show large load.

GR-1000XLL-4 WORKING RANGE CHART

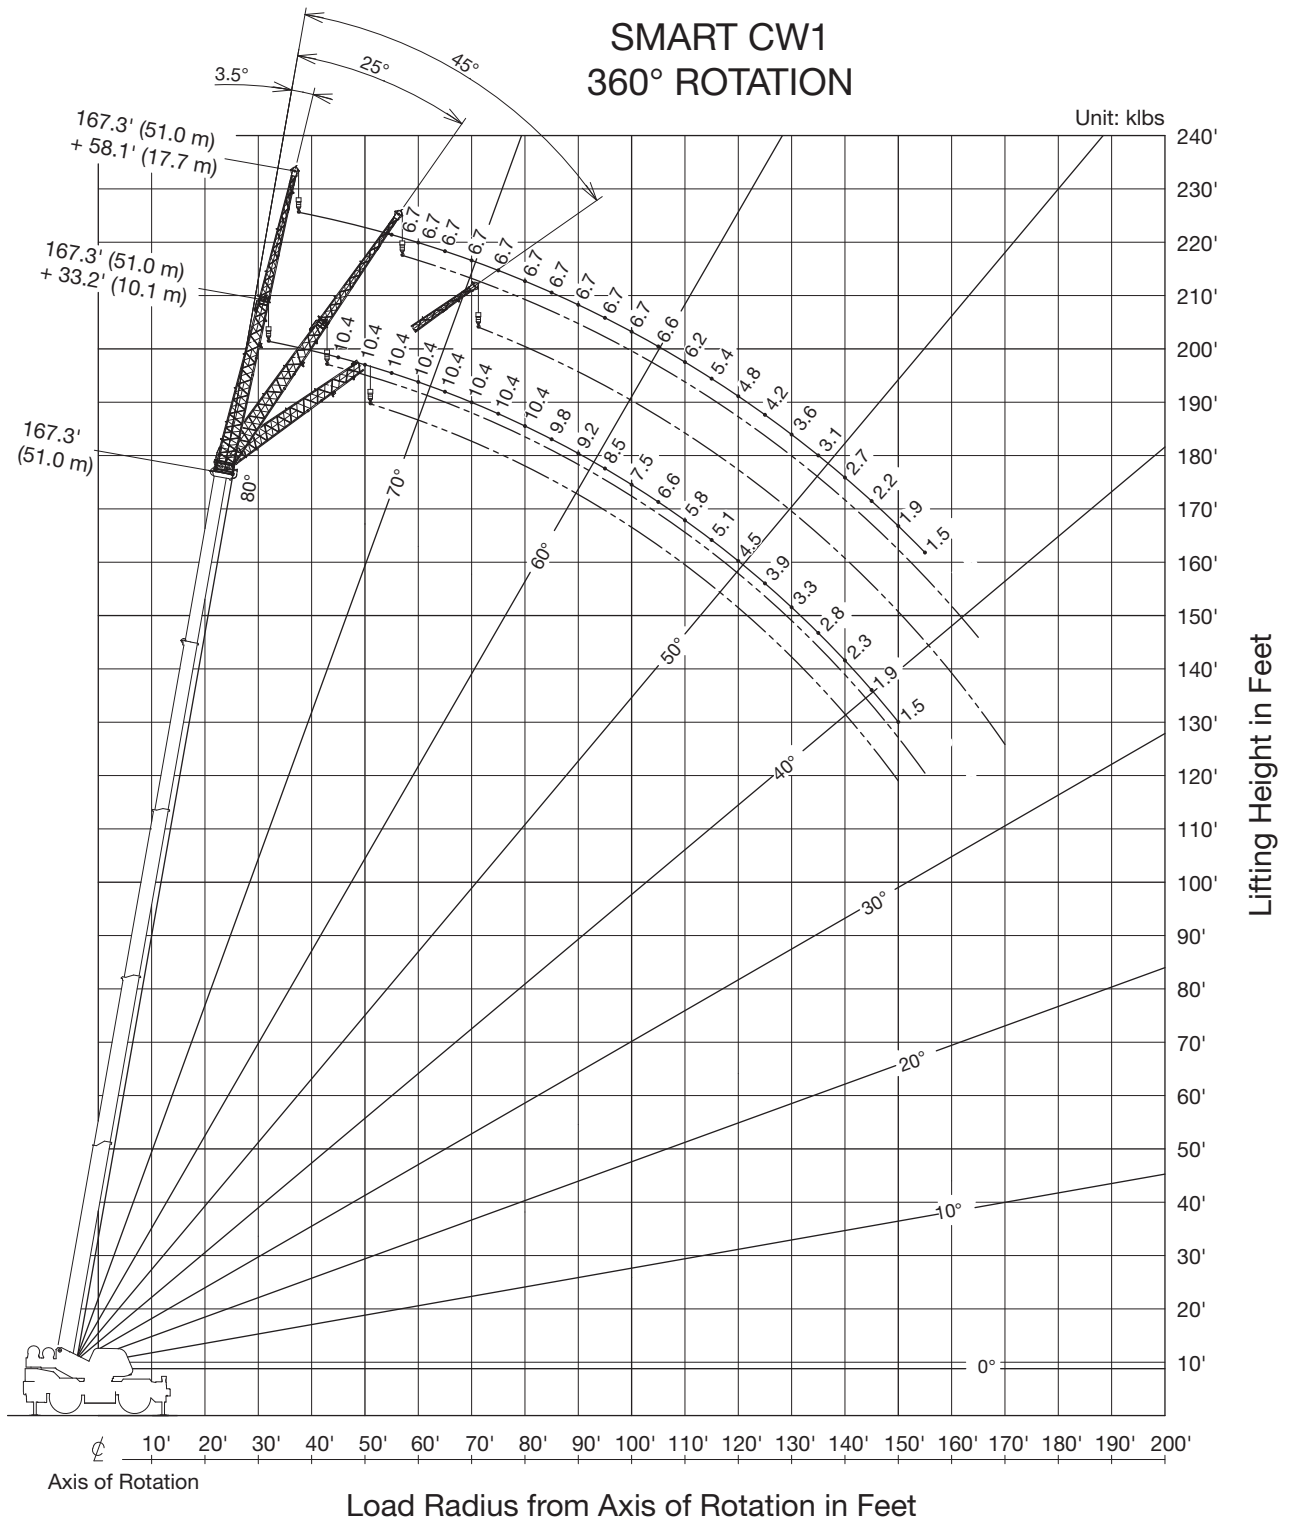


NOTE: Jib geometry shown are for unloaded condition and machine standing level on firm supporting surface. Boom deflection and subsequent radius and boom angle change must be accounted for when applying load to hook.

JIB




GR-1000XLL-4 WORKING RANGE CHART

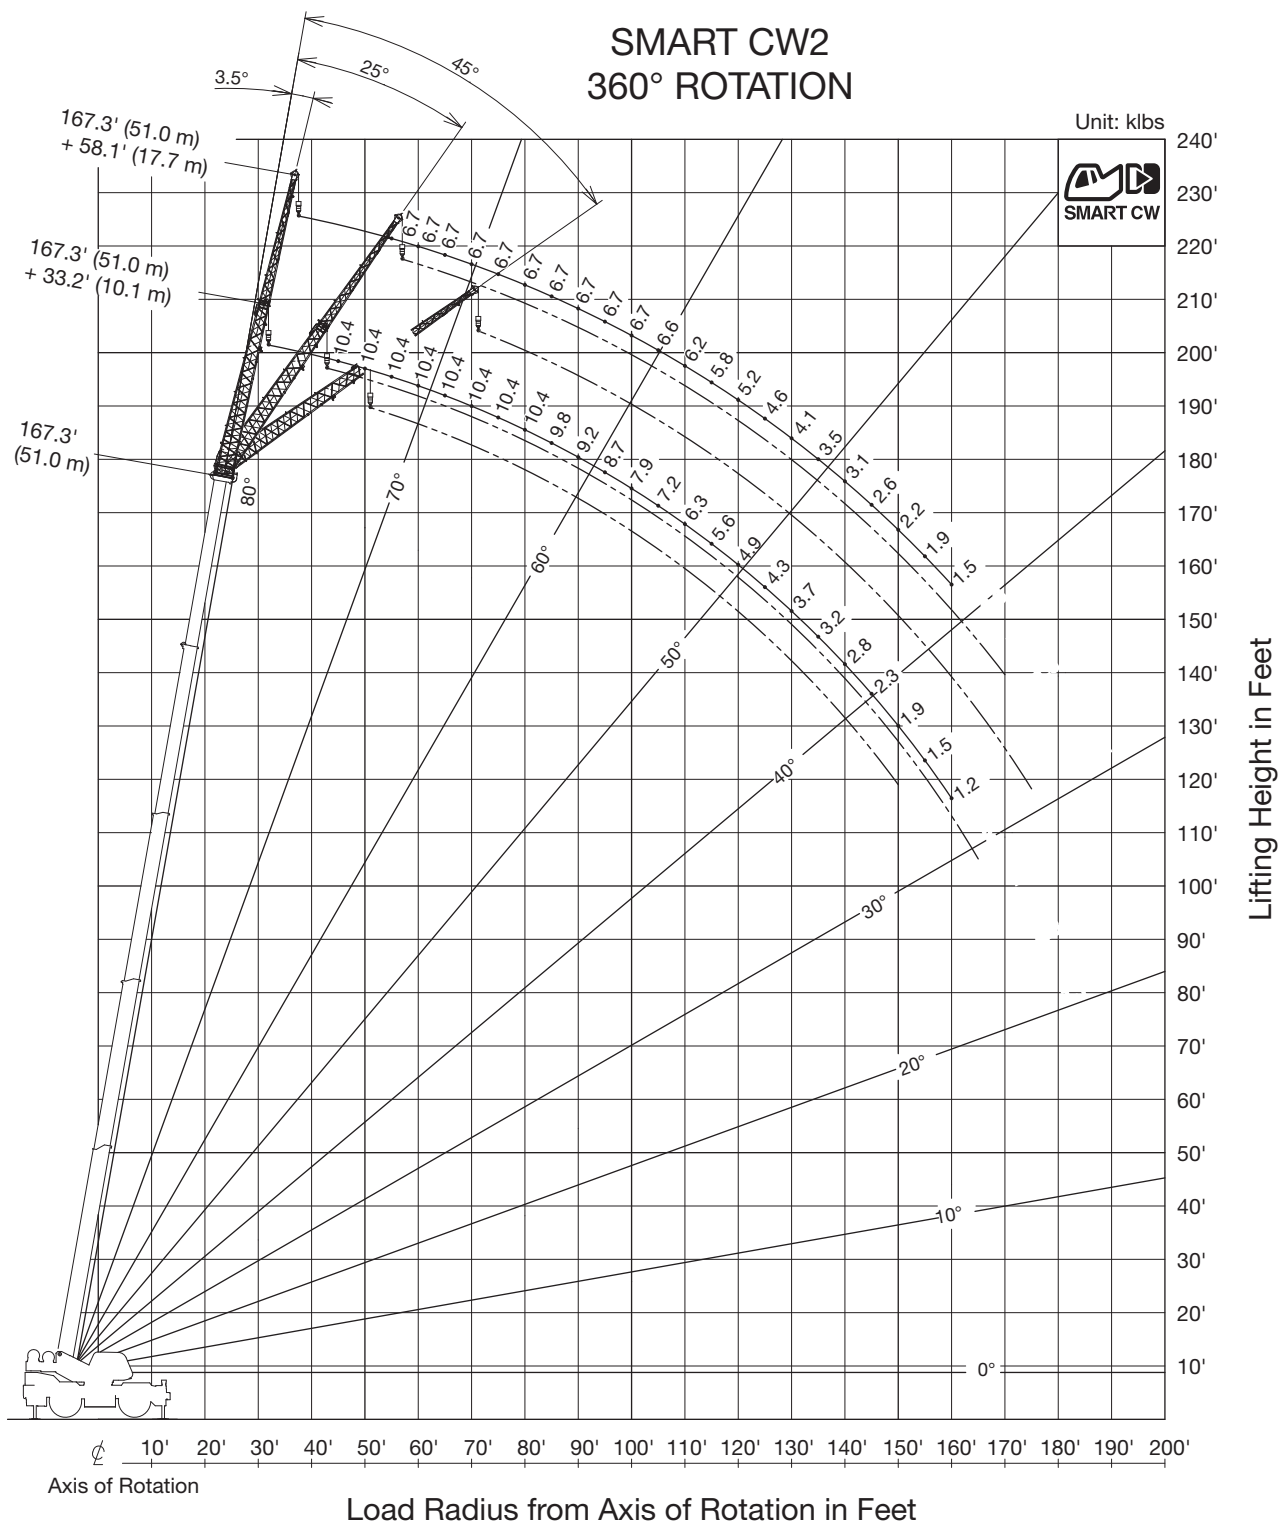


NOTE: Jib geometry shown are for unloaded condition and machine standing level on firm supporting surface. Boom deflection and subsequent radius and boom angle change must be accounted for when applying load to hook.

JIB




GR-1000XLL-4 WORKING RANGE CHART

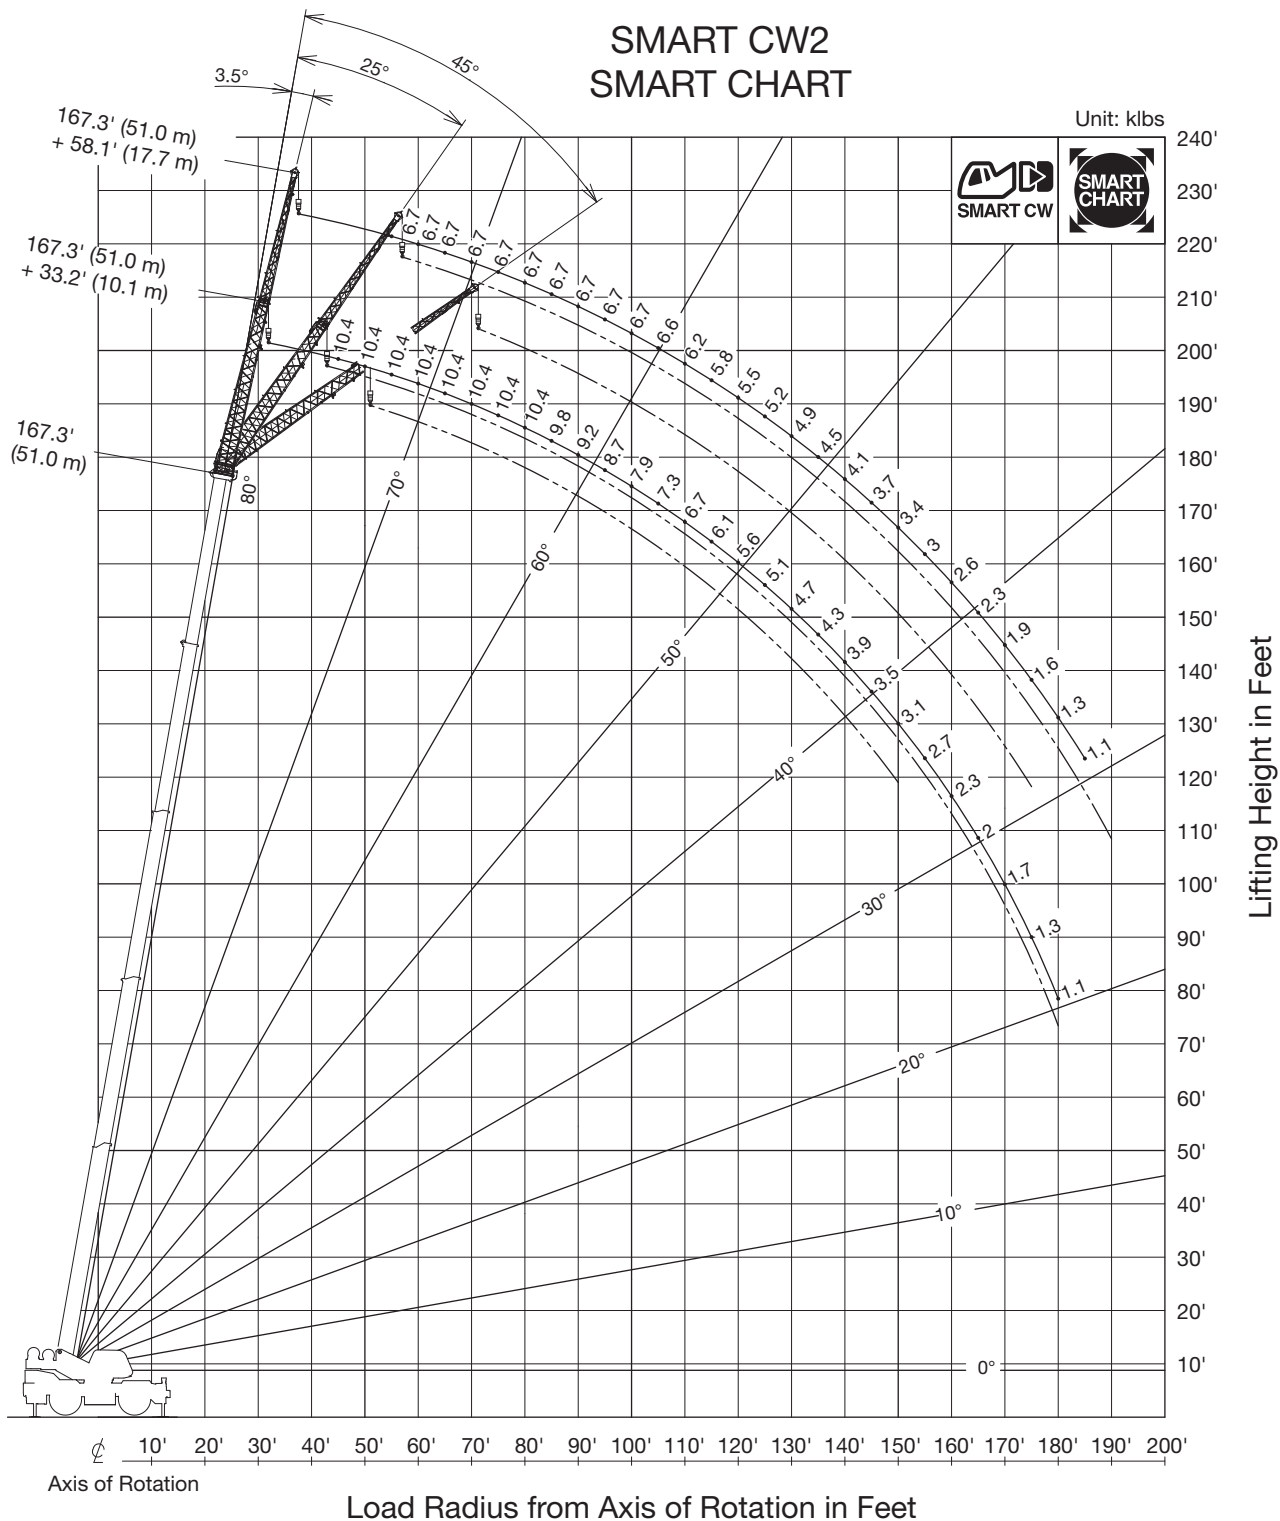

NOTE: Jib geometry shown are for unloaded condition and machine standing level on firm supporting surface. Boom deflection and subsequent radius and boom angle change must be accounted for when applying load to hook.

JIB



GR-1000XLL-4 RATED LIFTING CAPACITIES (IN POUNDS)

COUNTERWEIGHT 24,700lbs (11.2 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD 360° ROTATION SMART CW1																	
B	A	42.0' (12.8 m)	57.7' (17.6 m)	73.3' (22.4 m)		89.0' (27.1 m)		104.7' (31.9 m)		120.3' (36.7 m)		136.0' (41.5 m)		151.7' (46.2 m)		167.3' (51 m)	
8		200,000	99,600														
10		180,900	99,600	74,800	33,800												
12		158,800	99,600	74,800	33,800												
15		133,100	99,600	74,800	33,800	39,900	29,700										
20		102,000	99,600	74,200	33,800	39,900	29,700	33,800	27,700	30,000	27,600						
25		78,500	77,900	62,300	33,800	39,900	29,700	33,800	27,700	30,000	27,600	28,300	27,500				
30		61,700	60,900	53,400	33,800	39,900	29,700	33,800	27,700	30,000	27,600	28,300	26,100	26,400	24,100		
35			47,600	46,300	33,800	39,300	29,700	33,800	27,700	30,000	27,400	28,300	23,900	26,400	23,600	20,700	
40			36,900	35,900	33,800	34,600	29,700	31,200	27,700	28,800	25,000	27,100	21,500	25,400	22,000	20,700	
45			29,400	28,500	33,800	30,600	29,700	27,600	26,300	25,500	23,000	24,000	19,500	22,900	20,500	20,100	
50			23,900	23,000	29,000	25,000	29,700	24,700	23,900	22,800	21,200	21,400	17,800	20,400	19,100	19,000	
55				18,800	24,500	20,800	25,300	21,800	22,000	20,500	19,800	19,200	16,300	18,300	17,600	17,600	
60				15,400	21,000	17,400	21,700	18,400	20,300	18,500	18,200	17,400	15,000	16,500	16,200	15,800	
65				12,800	18,200	14,600	18,900	15,700	18,800	16,400	16,900	15,700	14,000	14,900	15,100	14,300	
70						12,300	16,500	13,400	17,000	14,100	15,700	14,300	13,000	13,600	14,100	13,000	
75						10,400	14,600	11,400	15,000	12,200	14,700	12,700	12,100	12,400	13,200	11,800	
80						8,800	12,900	9,800	13,300	10,500	13,600	11,000	11,400	11,300	12,400	10,800	
85								8,400	11,800	9,100	12,100	9,600	10,700	10,000	11,200	9,900	
90								7,200	10,600	7,900	10,800	8,400	10,100	8,800	9,900	9,000	
95								6,100	9,500	6,800	9,700	7,300	9,500	7,600	8,800	7,900	
100										5,800	8,700	6,300	8,900	6,700	7,800	6,900	
105										5,000	7,900	5,500	8,000	5,800	7,000	6,100	
110										4,300	7,100	4,700	7,200	5,000	6,200	5,300	
115												4,000	6,500	4,300	5,500	4,600	
120												3,400	5,900	3,700	4,900	4,000	
125												2,900	5,400	3,200	4,300	3,400	
130														2,700	3,800	2,900	
135														2,200	3,300	2,400	
140														1,800	2,900	2,000	
145																1,600	
D		0°									10°	0°	12°	0°	15°	13°	26°
Telescoping mode	1, 2	1	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1, 2
2nd Boom	0	50	100	0	100	0	100	0	100	0	100	0	100	50	100	100	
3rd Boom	0	0	0	33	16	50	33	67	50	83	67	100	83	100	100	100	
4th Boom	0	0	0	33	16	50	33	67	50	83	67	100	83	100	100	100	
Top Boom	0	0	0	33	16	50	33	67	50	83	67	100	83	100	100	100	

COUNTERWEIGHT 24,700lbs (11.2 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD 360° ROTATION SMART CW1																															
A C		42.0'		57.7'		73.3'		73.3'		89.0'		89.0'		104.7'		104.7'				120.3'				136.0'							
		B	(12.8 m)	B	(17.6 m)	B	(22.4 m)	B	(22.4 m)	B	(27.1 m)	B	(27.1 m)	B	(31.9 m)	B	(31.9 m)			B	(36.7 m)			B	(41.5 m)						
0°		35.2	19,700	50.7	10,900	66.1	4,600	66.1	9,500	81.7	3,200	81.8	6,700	97.2	1,800	97.2	5,100			112.1	4,400			126.7	3,900						
Telescoping mode		1, 2		1		1		2		1		2		1		2				2				2							

A: Boom length in feet

B: Load radius in feet


C: Loaded boom angle (°)

D: Minimum boom angle (°) for indicated length (no load)

NOTE: The lifting capacity data stored in the LOAD MOMENT INDICATOR (AML-E2) is based on the standard number of parts of line listed in the chart.
Standard number of parts of line for each boom length should be according to the following table.

Boom length in feet (meters)	42.0' (12.8 m)	42.0' to 73.3' (12.8 m to 22.4 m)	73.3' to 167.3' (22.4 m to 51 m)	Single top jib
Telescoping mode	1, 2	1	2	1, 2
Number of parts of line	16	8	4	1

GR-1000XLL-4 RATED LIFTING CAPACITIES (IN POUNDS)

<div><div></div><div>COUNTERWEIGHT 24,700lbs (11.2 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD 360° ROTATION SMART CW2</div></div>																
<div><div>A</div><div>B</div></div>	42.0' (12.8 m)	57.7' (17.6 m)	73.3' (22.4 m)		89.0' (27.1 m)		104.7' (31.9 m)		120.3' (36.7 m)		136.0' (41.5 m)		151.7' (46.2 m)		167.3' (51 m)	
8	200,000	99,600														
10	183,400	99,600	74,800	33,800												
12	161,000	99,600	74,800	33,800												
15	135,100	99,600	74,800	33,800	39,900	29,700										
20	103,900	99,600	74,200	33,800	39,900	29,700	33,800	27,700	30,000	27,600						
25	80,100	79,500	62,300	33,800	39,900	29,700	33,800	27,700	30,000	27,600	28,300	27,500				
30	63,300	62,500	53,400	33,800	39,900	29,700	33,800	27,700	30,000	27,600	28,300	26,100	26,400	24,100		
35		49,400	46,500	33,800	39,300	29,700	33,800	27,700	30,000	27,400	28,300	23,900	26,400	23,600	20,700	
40		38,400	37,400	33,800	34,600	29,700	31,200	27,700	28,800	25,000	27,100	21,500	25,400	22,000	20,700	
45		30,700	29,800	33,800	30,700	29,700	27,600	26,300	25,500	23,000	24,000	19,500	22,900	20,500	20,100	
50		25,100	24,100	30,100	26,200	29,700	24,700	23,900	22,800	21,200	21,400	17,800	20,400	19,100	19,000	
55			19,800	25,600	21,800	26,300	22,300	22,000	20,500	19,800	19,200	16,300	18,300	17,600	17,600	
60			16,400	21,900	18,300	22,700	19,300	20,300	18,500	18,200	17,400	15,000	16,500	16,200	15,800	
65			13,600	19,000	15,400	19,700	16,500	18,800	16,800	16,900	15,700	14,000	14,900	15,100	14,300	
70					13,100	17,300	14,100	17,600	14,900	15,700	14,300	13,000	13,600	14,100	13,000	
75					11,100	15,300	12,100	15,700	12,900	14,700	13,100	12,100	12,400	13,200	11,800	
80					9,400	13,600	10,400	13,900	11,200	13,700	11,700	11,400	11,300	12,400	10,800	
85							9,000	12,400	9,700	12,700	10,200	10,700	10,400	11,700	9,900	
90							7,700	11,100	8,400	11,400	9,000	10,100	9,300	10,500	9,000	
95							6,600	10,000	7,300	10,200	7,800	9,500	8,200	9,300	8,300	
100									6,300	9,200	6,800	9,000	7,200	8,400	7,500	
105									5,500	8,300	5,900	8,500	6,300	7,500	6,600	
110									4,700	7,600	5,100	7,700	5,500	6,600	5,800	
115											4,400	6,900	4,800	5,900	5,000	
120											3,800	6,300	4,100	5,300	4,400	
125											3,300	5,800	3,500	4,700	3,800	
130													3,000	4,100	3,300	
135													2,600	3,700	2,800	
140													2,200	3,300	2,300	
145															1,900	
150															1,600	
155															1,300	
D	0°															
Telescoping mode	1, 2	1	1	2	1	2	1	2	1	2	1	2	1	2	1	2
2nd Boom	0	50	100	0	100	0	100	0	100	0	100	0	100	50	100	100
3rd Boom	0	0	0	33	16	50	33	67	50	83	67	100	83	100	100	100
4th Boom	0	0	0	33	16	50	33	67	50	83	67	100	83	100	100	100
Top Boom	0	0	0	33	16	50	33	67	50	83	67	100	83	100	100	100


COUNTERWEIGHT 24,700lbs (11.2 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD 360° ROTATION SMART CW2																												
A		42.0'		57.7'		73.3'		73.3'		89.0'		89.0'		104.7'		104.7'			120.3'			136.0'						
C	B	(12.8 m)	B	(17.6 m)	B	(22.4 m)	B	(22.4 m)	B	(27.1 m)	B	(27.1 m)	B	(31.9 m)	B	(31.9 m)			B	(36.7 m)			B	(41.5 m)				
0°	35.2	19,700	50.7	10,900	66.1	4,600	66.1	9,500	81.7	3,200	81.8	6,700	97.2	1,800	97.2	5,200			112.1	4,500			126.7	4,100				
Telescoping mode	1, 2		1		1		2		1		2		1		2				2				2					

A: Boom length in feet
B: Load radius in feet
C: Loaded boom angle (°)
D: Minimum boom angle (°) for indicated length (no load)

NOTE: The lifting capacity data stored in the LOAD MOMENT INDICATOR (AML-E2) is based on the standard number of parts of line listed in the chart.
Standard number of parts of line for each boom length should be according to the following table.

Boom length in feet (meters)	42.0' (12.8 m)	42.0' to 73.3' (12.8 m to 22.4 m)	73.3' to 167.3' (22.4 m to 51 m)	Single top jib
Telescoping mode	1, 2	1	2	1, 2
Number of parts of line	16	8	4	1

GR-1000XLL-4 RATED LIFTING CAPACITIES (IN POUNDS)

		COUNTERWEIGHT 24,700lbs (11.2 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD															
		SMART CHART SMART CW2															
B	A	42.0' (12.8 m)	57.7' (17.6 m)	73.3' (22.4 m)		89.0' (27.1 m)		104.7' (31.9 m)		120.3' (36.7 m)		136.0' (41.5 m)		151.7' (46.2 m)		167.3' (51 m)	
8		200,000	99,600														
10		183,400	99,600	74,800	33,800												
12		161,000	99,600	74,800	33,800												
15		135,100	99,600	74,800	33,800	39,900	29,700										
20		103,900	99,600	74,200	33,800	39,900	29,700	33,800	27,700	30,000	27,600						
25		80,100	79,500	62,300	33,800	39,900	29,700	33,800	27,700	30,000	27,600	28,300	27,500				
30		63,300	62,500	53,400	33,800	39,900	29,700	33,800	27,700	30,000	27,600	28,300	26,100	26,400	24,100		
35			49,900	46,500	33,800	39,300	29,700	33,800	27,700	30,000	27,400	28,300	23,900	26,400	23,600	20,700	
40			41,000	40,300	33,800	34,600	29,700	31,200	27,700	28,800	25,000	27,100	21,500	25,400	22,000	20,700	
45			34,300	33,600	33,800	30,700	29,700	27,600	26,300	25,500	23,000	24,000	19,500	22,900	20,500	20,100	
50			29,200	28,400	33,200	27,500	29,700	24,700	23,900	22,800	21,200	21,400	17,800	20,400	19,100	19,000	
55				24,200	29,000	24,800	29,600	22,300	22,000	20,500	19,800	19,200	16,300	18,300	17,600	17,600	
60				20,200	25,600	22,200	26,200	20,200	20,300	18,500	18,200	17,400	15,000	16,500	16,200	15,800	
65				17,100	22,600	18,900	23,300	18,300	18,800	16,800	16,900	15,700	14,000	14,900	15,100	14,300	
70						16,100	20,500	16,800	17,600	15,400	15,700	14,300	13,000	13,600	14,100	13,000	
75						13,900	18,200	15,000	16,400	14,100	14,700	13,100	12,100	12,400	13,200	11,800	
80						11,900	16,200	13,000	15,500	12,900	13,700	12,000	11,400	11,300	12,400	10,800	
85								11,300	14,600	11,900	12,900	11,000	10,700	10,400	11,700	9,900	
90								9,900	13,400	10,600	12,200	10,100	10,100	9,500	11,000	9,000	
95								8,600	12,100	9,300	11,500	9,300	9,500	8,700	10,300	8,300	
100										8,200	11,000	8,600	9,000	8,000	9,700	7,600	
105										7,200	10,100	7,700	8,600	7,400	9,100	7,000	
110										6,300	9,300	6,800	8,200	6,800	8,300	6,400	
115												6,000	7,800	6,300	7,500	5,900	
120												5,300	7,500	5,600	6,800	5,400	
125												4,700	7,200	5,000	6,100	5,000	
130														4,400	5,500	4,600	
135														3,800	5,000	4,100	
140														3,400	4,500	3,600	
145																	3,100
150																	2,700
155																	2,400
D			0°														
Telescoping mode	1, 2	1	1	2	1	2	1	2	9°	0°	11°	0°	13°	12°	16°		
2nd Boom	0	50	100	0	100	0	100	0	100	0	100	0	100	50	100		
3rd Boom	0	0	0	33	16	50	33	67	50	83	67	100	83	100	100		
4th Boom	0	0	0	33	16	50	33	67	50	83	67	100	83	100	100		
Top Boom	0	0	0	33	16	50	33	67	50	83	67	100	83	100	100		

		COUNTERWEIGHT 24,700lbs (11.2 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD													
		SMART CHART SMART CW2													
C	A	42.0' (12.8 m)	57.7' (17.6 m)	73.3' (22.4 m)	73.3' (22.4 m)	89.0' (27.1 m)	89.0' (27.1 m)	104.7' (31.9 m)	104.7' (31.9 m)	120.3' (36.7 m)		136.0' (41.5 m)			
		B	B	B	B	B	B	B	B	B	B	B	B		
0°		35.2	19,700	50.7	10,900	66.1	4,600	66.1	9,500	81.7	3,400	81.7	7,000	97.2	2,000
Telescoping mode		1, 2	1	1	2	1	2	1	2	1	2	1	2		

A: Boom length in feet

B: Load radius in feet

C: Loaded boom angle (°)

D: Minimum boom angle (°) for indicated length (no load)

NOTE: The lifting capacity data stored in the LOAD MOMENT INDICATOR (AML-E2) is based on the standard number of parts of line listed in the chart. Standard number of parts of line for each boom length should be according to the following table.

Boom length in feet (meters)	42.0' (12.8 m)	42.0' to 73.3' (12.8 m to 22.4 m)	73.3' to 167.3' (22.4 m to 51 m)	Single top jib
Telescoping mode	1, 2	1	2	1, 2
Number of parts of line	16	8	4	1

GR-1000XLL-4 RATED LIFTING CAPACITIES (IN POUNDS)

COUNTERWEIGHT 24,700 lbs (11.2 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD 360° ROTATION SMART CW1						
B	167.3' (51 m) Boom + 33.2' (10.1 m) JIB					
	3.5° Offset	25° Offset		45° Offset		
45	10,400					
50	10,400					
55	10,400					
60	10,400					
65	10,400					
70	10,400	10,400				
75	10,400	10,400				
80	10,400	10,200				
85	9,800	9,500				
90	9,200	8,500				
95	8,500	8,000				
100	7,500	7,600				
105	6,700	7,200				
110	5,800	6,700				
115	5,100	5,900				
120	4,500	5,200				
125	3,900	4,500				
130	3,300	3,900				
135	2,800	3,400				
140	2,400	2,800				
145	1,900	2,400				
150	1,500	1,900				
155		1,500				
160						
165						
170						
Telescoping mode	1, 2	1, 2		1, 2		

COUNTERWEIGHT 24,700 lbs (11.2 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD 360° ROTATION SMART CW1						
B	167.3' (51 m) Boom + 58.1' (17.7 m) JIB					
	3.5° Offset	25° Offset		45° Offset		
45						
50						
55	6,700					
60	6,700					
65	6,700					
70	6,700					
75	6,700	6,200				
80	6,700	6,100				
85	6,700	5,900				
90	6,700	5,800				4,800
95	6,700	5,600				4,700
100	6,700	5,500				4,600
105	6,600	5,400				4,500
110	6,200	5,300				4,400
115	5,400	5,200				4,300
120	4,800	5,000				4,200
125	4,200	4,900				4,200
130	3,600	4,600				4,100
135	3,100	4,200				4,000
140	2,700	3,700				4,000
145	2,200	3,200				3,800
150	1,900	2,700				3,200
155	1,500	2,300				2,800
160		1,900				2,300
165		1,500				1,900
170						1,500
Telescoping mode	1, 2	1, 2		1, 2		


COUNTERWEIGHT 24,700 lbs (11.2 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD 360° ROTATION SMART CW1						
B	151.7' (46.2 m) Boom + 33.2' (10.1 m) JIB					
	3.5° Offset	25° Offset		45° Offset		
40	12,500	11,500				
45	12,500	11,500				
50	12,500	11,500				
55	12,500	11,500	12,500	11,500		
60	12,500	11,500	12,500	11,500	10,000	10,000
65	12,500	11,500	12,100	11,100	9,800	9,700
70	12,500	11,500	11,700	10,300	9,600	9,500
75	12,500	10,900	11,400	9,700	9,400	9,200
80	11,700	10,300	11,000	9,100	9,200	8,600
85	10,700	9,800	10,700	8,500	9,100	8,200
90	9,800	8,600	10,100	8,000	8,900	7,700
95	8,700	8,000	9,300	7,600	8,800	7,300
100	7,700	7,600	8,600	7,100	8,700	6,900
105	6,800	7,100	7,600	6,800	8,000	6,600
110	6,000	6,700	6,700	6,400	7,200	6,200
115	5,200	6,200	6,000	6,100	6,300	6,000
120	4,600	5,600	5,200	5,800	5,600	5,700
125	4,000	5,000	4,600	5,400	4,900	5,400
130	3,400	4,400	3,900	4,900	4,200	5,000
135	2,900	3,900	3,400	4,300	3,600	4,500
140	2,400	3,400	2,900	3,800		
145	2,000	3,000	2,400	3,300		
150	1,600	2,600	2,000	2,900		
155	1,300	2,200	1,500	2,400		
160	900	1,900	1,100	2,100		
165		1,500		1,700		
170		1,300				
175		1,000				
180						
185						
Telescoping mode	1	2	1	2	1	2

COUNTERWEIGHT 24,700 lbs (11.2 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD 360° ROTATION SMART CW1						
B	151.7' (46.2 m) Boom + 58.1' (17.7 m) JIB					
	3.5° Offset	25° Offset		45° Offset		
40						
45						
50	7,600	7,200				
55	7,600	7,200				
60	7,600	7,200				
65	7,600	7,200				
70	7,600	7,200	6,500	6,500		
75	7,600	7,200	6,300	6,300		
80	7,600	7,200	6,200	6,100	5,000	
85	7,600	7,200	6,000	5,900	4,900	4,900
90	7,600	7,200	5,900	5,800	4,800	4,800
95	7,300	7,000	5,700	5,600	4,700	4,700
100	7,100	6,500	5,600	5,500	4,600	4,500
105	6,900	6,100	5,400	5,400	4,500	4,500
110	6,400	5,800	5,300	5,300	4,400	4,400
115	5,700	5,400	5,200	5,100	4,300	4,300
120	5,000	5,100	5,000	4,800	4,200	4,200
125	4,400	4,800	4,900	4,600	4,100	4,100
130	3,900	4,600	4,700	4,300	4,100	4,100
135	3,400	4,300	4,300	4,100	4,000	4,000
140	2,900	3,800	3,800	3,900	4,000	3,800
145	2,500	3,400	3,300	3,700	3,800	3,700
150	2,100	3,000	2,800	3,500	3,300	3,500
155	1,700	2,600	2,400	3,200	2,800	3,300
160	1,300	2,200	2,000	2,800	2,300	3,100
165		1,900	1,600	2,500		
170		1,600	1,300	2,100		
175		1,400		1,800		
180		1,100		1,500		
185				1,200		
Telescoping mode	1	2	1	2	1	2

COUNTERWEIGHT 24,700 lbs (11.2 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD 360° ROTATION SMART CW1													
120.3' (36.7 m) Boom + 33.2 ' (10.1 m) JIB							120.3' (36.7 m) Boom + 58.1 ' (17.7 m) JIB						
B	3.5° Offset		25° Offset		45° Offset		B	3.5° Offset		25° Offset		45° Offset	
30	14,600	14,600					30						
35	14,600	14,600					35						
40	14,600	14,600	14,400				40	9,900	8,700				
45	14,600	14,600	13,800	13,600			45	9,900	8,700				
50	14,600	14,600	13,200	13,000	10,400	10,400	50	9,900	8,700				
55	14,600	14,600	12,700	12,500	10,200	10,100	55	9,900	8,700				
60	14,600	14,400	12,200	12,000	9,900	9,800	60	9,900	8,700	7,200	7,000		
65	14,600	13,400	11,800	11,600	9,700	9,600	65	9,600	8,700	7,000	6,800		
70	14,600	12,600	11,400	11,200	9,500	9,400	70	9,100	8,700	6,700	6,500	5,300	5,300
75	13,900	12,400	11,000	10,800	9,300	9,200	75	8,700	8,400	6,500	6,300	5,200	5,100
80	12,400	11,700	10,700	10,500	9,200	9,100	80	8,300	8,000	6,300	6,200	5,000	5,000
85	10,900	11,000	10,400	10,200	9,000	8,900	85	8,000	7,700	6,100	6,000	4,900	4,800
90	9,600	10,300	10,100	9,900	8,900	8,800	90	7,700	7,400	5,800	5,800	4,700	4,700
95	8,500	9,800	9,300	9,700	8,800	8,700	95	7,400	7,100	5,600	5,500	4,600	4,600
100	7,500	9,300	8,200	9,200	8,600	8,600	100	7,100	6,900	5,400	5,300	4,500	4,500
105	6,600	8,800	7,200	8,700	7,600	8,500	105	6,800	6,600	5,200	5,200	4,400	4,400
110	5,800	7,900	6,300	8,300	6,600	8,300	110	6,600	6,400	5,100	5,000	4,300	4,300
115	5,000	7,200	5,500	7,600	5,800	7,800	115	6,000	6,200	4,900	4,900	4,300	4,200
120	4,400	6,500	4,800	6,900			120	5,300	6,000	4,800	4,700	4,200	4,100
125	3,700	5,900	4,100	6,200			125	4,700	5,800	4,600	4,600	4,100	4,100
130	3,200	5,400	3,500	5,600			130	4,100	5,600	4,500	4,500	4,100	4,000
135	2,700	4,900	2,900	5,000			135	3,600	5,300	4,300	4,300	4,000	4,000
140	2,200	4,400					140	3,100	5,000	3,700	4,300	4,000	4,000
145	1,800	4,000					145	2,700	4,500	3,200	4,200		
150							150	2,300	4,100	2,800	4,100		
155							155	1,900	3,700	2,300	4,000		
160							160	1,600	3,400	1,900	3,600		
165							165	1,300	3,100				
170							170	900	2,800				
Telescoping mode	1	2	1	2	1	2	Telescoping mode	1	2	1	2	1	2

GR-1000XLL-4 RATED LIFTING CAPACITIES (IN POUNDS)


COUNTERWEIGHT 24,700 lbs (11.2 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD 360° ROTATION SMART CW2													
167.3' (51 m) Boom + 33.2' (10.1 m) JIB							167.3' (51 m) Boom + 58.1' (17.7 m) JIB						
B	3.5° Offset	25° Offset	45° Offset		B	3.5° Offset	25° Offset	45° Offset		B	3.5° Offset	25° Offset	45° Offset
45	10,400				45					45			
50	10,400				50					50			
55	10,400				55	6,700				55	6,700		
60	10,400	10,400			60	6,700				60	6,700		
65	10,400	10,400	9,800		65	6,700				65	6,700		
70	10,400	10,400	9,600		70	6,700				70	6,700		
75	10,400	10,200	9,400		75	6,700	6,200			75	6,700	6,200	
80	10,400	9,500	9,000		80	6,700	6,100			80	6,700	6,100	
85	9,800	9,000	8,500		85	6,700	5,900			85	6,700	5,900	
90	9,200	8,500	8,100		90	6,700	5,800	4,800		90	6,700	5,800	4,800
95	8,700	8,000	7,700		95	6,700	5,600	4,700		95	6,700	5,600	4,700
100	7,900	7,600	7,300		100	6,700	5,500	4,600		100	6,700	5,500	4,600
105	7,200	7,200	6,900		105	6,600	5,400	4,500		105	6,600	5,400	4,500
110	6,300	6,800	6,600		110	6,200	5,300	4,400		110	6,200	5,300	4,400
115	5,600	6,300	6,300		115	5,800	5,200	4,300		115	5,800	5,200	4,300
120	4,900	5,600	6,000		120	5,200	5,000	4,200		120	5,200	5,000	4,200
125	4,300	4,900	5,300		125	4,600	4,900	4,200		125	4,600	4,900	4,200
130	3,700	4,300	4,700		130	4,100	4,600	4,100		130	4,100	4,600	4,100
135	3,200	3,800	4,100		135	3,500	4,400	4,000		135	3,500	4,400	4,000
140	2,800	3,200	3,500		140	3,100	4,100	4,000		140	3,100	4,100	4,000
145	2,300	2,800	3,000		145	2,600	3,500	3,900		145	2,600	3,500	3,900
150	1,900	2,300	2,500		150	2,200	3,100	3,600		150	2,200	3,100	3,600
155	1,500	1,900			155	1,900	2,600	3,100		155	1,900	2,600	3,100
160	1,200	1,500			160	1,500	2,200	2,700		160	1,500	2,200	2,700
165		1,100			165		1,900	2,200		165		1,900	2,200
170					170		1,500	1,800		170		1,500	1,800
175					175			1,400		175			1,400
Telescoping mode	1, 2	1, 2	1, 2		Telescoping mode	1, 2	1, 2	1, 2		Telescoping mode	1, 2	1, 2	1, 2


		COUNTERWEIGHT 24,700 lbs (11.2 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD 360° ROTATION SMART CW2											
B	151.7' (46.2 m) Boom + 33.2' (10.1 m) JIB						B	151.7' (46.2 m) Boom + 58.1' (17.7 m) JIB					
	3.5° Offset		25° Offset		45° Offset			3.5° Offset		25° Offset		45° Offset	
40	12,500	11,500					40						
45	12,500	11,500					45						
50	12,500	11,500					50	7,600	7,200				
55	12,500	11,500	12,500	11,500			55	7,600	7,200				
60	12,500	11,500	12,500	11,500	10,000	10,000	60	7,600	7,200				
65	12,500	11,500	12,100	11,100	9,800	9,700	65	7,600	7,200				
70	12,500	11,500	11,700	10,300	9,600	9,500	70	7,600	7,200	6,500	6,500		
75	12,500	10,900	11,400	9,700	9,400	9,200	75	7,600	7,200	6,300	6,300		
80	11,700	10,300	11,000	9,100	9,200	8,600	80	7,600	7,200	6,200	6,100	5,000	
85	10,700	9,800	10,700	8,500	9,100	8,200	85	7,600	7,200	6,000	5,900	4,900	4,900
90	9,800	8,600	10,100	8,000	8,900	7,700	90	7,600	7,200	5,900	5,800	4,800	4,800
95	9,000	8,000	9,300	7,600	8,800	7,300	95	7,300	7,000	5,700	5,600	4,700	4,700
100	8,200	7,600	8,600	7,100	8,700	6,900	100	7,100	6,500	5,600	5,500	4,600	4,500
105	7,300	7,100	7,900	6,800	8,000	6,600	105	6,900	6,100	5,400	5,400	4,500	4,500
110	6,500	6,700	7,200	6,400	7,400	6,200	110	6,700	5,800	5,300	5,300	4,400	4,400
115	5,700	6,300	6,400	6,100	6,800	6,000	115	6,200	5,400	5,200	5,100	4,300	4,300
120	5,000	6,000	5,600	5,800	6,000	5,700	120	5,500	5,100	5,000	4,800	4,200	4,200
125	4,400	5,400	5,000	5,500	5,200	5,400	125	4,900	4,800	4,900	4,600	4,100	4,100
130	3,800	4,800	4,400	5,200	4,600	5,200	130	4,300	4,600	4,700	4,300	4,100	4,100
135	3,300	4,300	3,800	4,700	4,000	4,800	135	3,800	4,300	4,600	4,100	4,000	4,000
140	2,800	3,800	3,300	4,100			140	3,300	4,100	4,200	3,900	4,000	3,800
145	2,400	3,300	2,800	3,600			145	2,800	3,700	3,700	3,700	3,900	3,700
150	2,000	2,900	2,300	3,200			150	2,400	3,400	3,200	3,500	3,700	3,500
155	1,600	2,500	1,900	2,800			155	2,100	3,000	2,800	3,400	3,200	3,300
160	1,300	2,200	1,500	2,400			160	1,700	2,600	2,300	3,200	2,700	3,200
165		1,900	1,100	2,000			165	1,400	2,300	1,900	2,800		
170		1,500					170	1,100	2,000	1,600	2,400		
175		1,300					175		1,700	1,200	2,100		
180							180		1,400		1,700		
185							185		1,200		1,400		
Telescoping mode	1	2	1	2	1	2	Telescoping mode	1	2	1	2	1	2

COUNTERWEIGHT 24,700 lbs (11.2 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD 360° ROTATION SMART CW2													
B	120.3' (36.7 m) Boom + 33.2' (10.1 m) JIB						B	120.3' (36.7 m) Boom + 58.1' (17.7 m) JIB					
	3.5° Offset		25° Offset		45° Offset			3.5° Offset		25° Offset		45° Offset	
30	14,600	14,600					30						
35	14,600	14,600					35						
40	14,600	14,600	14,400				40	9,900	8,700				
45	14,600	14,600	13,800	13,600			45	9,900	8,700				
50	14,600	14,600	13,200	13,000	10,400	10,400	50	9,900	8,700				
55	14,600	14,600	12,700	12,500	10,200	10,100	55	9,900	8,700				
60	14,600	14,400	12,200	12,000	9,900	9,800	60	9,900	8,700	7,200	7,000		
65	14,600	13,400	11,800	11,600	9,700	9,600	65	9,600	8,700	7,000	6,800		
70	14,600	12,600	11,400	11,200	9,500	9,400	70	9,100	8,700	6,700	6,500	5,300	5,300
75	13,900	12,400	11,000	10,800	9,300	9,200	75	8,700	8,400	6,500	6,300	5,200	5,100
80	12,800	11,700	10,700	10,500	9,200	9,100	80	8,300	8,000	6,300	6,200	5,000	5,000
85	11,500	11,000	10,400	10,200	9,000	8,900	85	8,000	7,700	6,100	6,000	4,900	4,800
90	10,200	10,300	10,100	9,900	8,900	8,800	90	7,700	7,400	5,800	5,800	4,700	4,700
95	9,000	9,800	9,800	9,700	8,800	8,700	95	7,400	7,100	5,600	5,500	4,600	4,600
100	8,000	9,300	8,700	9,200	8,700	8,600	100	7,100	6,900	5,400	5,300	4,500	4,500
105	7,000	8,800	7,700	8,700	8,000	8,500	105	6,800	6,600	5,200	5,200	4,400	4,400
110	6,200	8,300	6,800	8,300	7,100	8,300	110	6,600	6,400	5,100	5,000	4,300	4,300
115	5,400	7,600	6,000	7,900	6,200	7,900	115	6,400	6,200	4,900	4,900	4,300	4,200
120	4,800	6,900	5,200	7,300			120	5,700	6,000	4,800	4,700	4,200	4,100
125	4,100	6,300	4,500	6,600			125	5,100	5,800	4,600	4,600	4,100	4,100
130	3,600	5,800	3,900	6,000			130	4,500	5,600	4,500	4,500	4,100	4,000
135	3,100	5,200	3,300	5,400			135	4,000	5,300	4,400	4,300	4,000	4,000
140	2,600	4,700					140	3,500	5,100	4,100	4,300	4,000	4,000
145	2,200	4,300					145	3,000	4,900	3,600	4,200		
150							150	2,600	4,400	3,100	4,100		
155							155	2,200	4,100	2,600	4,000		
160							160	1,900	3,700	2,200	3,900		
165							165	1,500	3,400				
170							170	1,200	3,100				
Telescoping mode	1	2	1	2	1	2	Telescoping mode	1	2	1	2	1	2

B: Load radius in feet

GR-1000XLL-4 RATED LIFTING CAPACITIES (IN POUNDS)

		COUNTERWEIGHT 24,700 lbs (11.2 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD SMART CHART SMART CW2											
B	167.3' (51 m) Boom + 33.2' (10.1 m) JIB						B	167.3' (51 m) Boom + 58.1' (17.7 m) JIB					
	3.5° Offset		25° Offset		45° Offset			3.5° Offset		25° Offset		45° Offset	
45	10,400						45						
50	10,400						50						
55	10,400						55	6,700					
60	10,400		10,400				60	6,700					
65	10,400	10,400	10,400		9,800		65	6,700					
70	10,400	10,400	10,400		9,600		70	6,700					
75	10,400	10,200	10,200		9,400		75	6,700		6,200			
80	10,400	9,500	9,500		9,000		80	6,700		6,100			
85	9,800	9,000	9,000		8,500		85	6,700		5,900			
90	9,200	8,500	8,500		8,100		90	6,700		5,800		4,800	
95	8,700	8,000	8,000		7,700		95	6,700		5,600		4,700	
100	7,900	7,600	7,600		7,300		100	6,700		5,500		4,600	
105	7,300	7,200	7,200		6,900		105	6,600		5,400		4,500	
110	6,700	6,800	6,800		6,600		110	6,200		5,300		4,400	
115	6,100	6,500	6,500		6,300		115	5,800		5,200		4,300	
120	5,600	5,900	5,900		6,000		120	5,500		5,000		4,200	
125	5,100	5,400	5,400		5,600		125	5,200		4,900		4,200	
130	4,700	5,000	5,000		5,100		130	4,900		4,600		4,100	
135	4,300	4,600	4,600		4,700		135	4,500		4,400		4,000	
140	3,900	4,200	4,200		4,300		140	4,100		4,200		4,000	
145	3,500	3,800	3,800		3,900		145	3,700		4,000		3,900	
150	3,100	3,400	3,400		3,500		150	3,400		3,800		3,700	
155	2,700	3,100	3,100				155	3,000		3,500		3,500	
160	2,300	2,700	2,700				160	2,600		3,200		3,400	
165	2,000	2,300	2,300				165	2,300		2,900		3,100	
170	1,700	1,900	1,900				170	1,900		2,600		2,800	
175	1,300	1,500	1,500				175	1,600		2,200		2,500	
180	1,100	1,200	1,200				180	1,300		1,900			
185							185	1,100		1,500			
190							190			1,200			
Telescoping mode	1, 2		1, 2		1, 2		Telescoping mode	1, 2		1, 2		1, 2	

		COUNTERWEIGHT 24,700 lbs (11.2 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD 3 STATE OFFSHORE SMART CW2													
B		151.7' (46.2 m) Boom + 33.2' (10.1 m) JIB						B		151.7' (46.2 m) Boom + 58.1' (17.7 m) JIB					
		3.5° Offset		25° Offset		45° Offset				3.5° Offset		25° Offset		45° Offset	
40		12,500	11,500					40							
45		12,500	11,500					45							
50		12,500	11,500					50	7,600	7,200					
55		12,500	11,500	12,500	11,500			55	7,600	7,200					
60		12,500	11,500	12,500	11,500	10,000	10,000	60	7,600	7,200					
65		12,500	11,500	12,100	11,100	9,800	9,700	65	7,600	7,200					
70		12,500	11,500	11,700	10,300	9,600	9,500	70	7,600	7,200	6,500	6,500			
75		12,500	10,900	11,400	9,700	9,400	9,200	75	7,600	7,200	6,300	6,300			
80		11,700	10,300	11,000	9,100	9,200	8,600	80	7,600	7,200	6,200	6,100	5,000		
85		10,700	9,800	10,700	8,500	9,100	8,200	85	7,600	7,200	6,000	5,900	4,900	4,900	
90		9,800	8,600	10,100	8,000	8,900	7,700	90	7,600	7,200	5,900	5,800	4,800	4,800	
95		9,000	8,000	9,300	7,600	8,800	7,300	95	7,300	7,000	5,700	5,600	4,700	4,700	
100		8,200	7,600	8,600	7,100	8,700	6,900	100	7,100	6,500	5,600	5,500	4,600	4,500	
105		7,600	7,100	7,900	6,800	8,000	6,600	105	6,900	6,100	5,400	5,400	4,500	4,500	
110		7,000	6,700	7,300	6,400	7,400	6,200	110	6,700	5,800	5,300	5,300	4,400	4,400	
115		6,400	6,300	6,700	6,100	6,800	6,000	115	6,500	5,400	5,200	5,100	4,300	4,300	
120		5,900	6,000	6,200	5,800	6,300	5,700	120	6,100	5,100	5,000	4,800	4,200	4,200	
125		5,400	5,700	5,700	5,500	5,800	5,400	125	5,600	4,800	4,900	4,600	4,100	4,100	
130		5,000	5,400	5,200	5,200	5,300	5,200	130	5,200	4,600	4,700	4,300	4,100	4,100	
135		4,600	5,100	4,800	5,000	4,900	4,900	135	4,700	4,300	4,600	4,100	4,000	4,000	
140		4,100	4,900	4,400	4,700			140	4,400	4,100	4,500	3,900	4,000	3,800	
145		3,600	4,500	3,900	4,600			145	4,000	3,900	4,400	3,700	3,900	3,700	
150		3,200	4,100	3,400	4,300			150	3,700	3,700	4,100	3,500	3,900	3,500	
155		2,700	3,600	3,000	3,900			155	3,200	3,500	3,700	3,400	3,800	3,300	
160		2,300	3,200	2,500	3,400			160	2,800	3,300	3,400	3,200	3,500	3,200	
165		2,000	2,900	2,100	3,000			165	2,500	3,100	3,100	3,100			
170		1,600	2,500					170	2,100	3,000	2,700	2,900			
175		1,300	2,200					175	1,800	2,700	2,300	2,800			
180								180		2,400	1,900	2,700			
185								185		2,100	1,600	2,300			
190								190		1,800	1,200	2,000			
Telescoping mode		1	2	1	2	1	2	Telescoping mode		1	2	1	2	1	2


COUNTERWEIGHT 24,700 lbs (11.2 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD SMART CHART SMART CW2													
120.3' (36.7 m) Boom + 33.2' (10.1 m) JIB							120.3' (36.7 m) Boom + 58.1' (17.7 m) JIB						
B	3.5° Offset		25° Offset		45° Offset		B	3.5° Offset		25° Offset		45° Offset	
30	14,600	14,600					30						
35	14,600	14,600					35						
40	14,600	14,600	14,400				40	9,900	8,700				
45	14,600	14,600	13,800	13,600			45	9,900	8,700				
50	14,600	14,600	13,200	13,000	10,400	10,400	50	9,900	8,700				
55	14,600	14,600	12,700	12,500	10,200	10,100	55	9,900	8,700				
60	14,600	14,400	12,200	12,000	9,900	9,800	60	9,900	8,700	7,200	7,000		
65	14,600	13,400	11,800	11,600	9,700	9,600	65	9,600	8,700	7,000	6,800		
70	14,600	12,600	11,400	11,200	9,500	9,400	70	9,100	8,700	6,700	6,500	5,300	5,300
75	13,900	12,400	11,000	10,800	9,300	9,200	75	8,700	8,400	6,500	6,300	5,200	5,100
80	12,800	11,700	10,700	10,500	9,200	9,100	80	8,300	8,000	6,300	6,200	5,000	5,000
85	11,700	11,000	10,400	10,200	9,000	8,900	85	8,000	7,700	6,100	6,000	4,900	4,800
90	10,800	10,300	10,100	9,900	8,900	8,800	90	7,700	7,400	5,800	5,800	4,700	4,700
95	10,000	9,800	9,900	9,700	8,800	8,700	95	7,400	7,100	5,600	5,500	4,600	4,600
100	9,200	9,300	9,400	9,200	8,700	8,600	100	7,100	6,900	5,400	5,300	4,500	4,500
105	8,500	8,800	8,700	8,700	8,600	8,500	105	6,800	6,600	5,200	5,200	4,400	4,400
110	7,900	8,300	8,100	8,300	8,200	8,300	110	6,600	6,400	5,100	5,000	4,300	4,300
115	7,000	7,900	7,500	7,900	7,600	7,900	115	6,400	6,200	4,900	4,900	4,300	4,200
120	6,300	7,500	6,700	7,500			120	6,100	6,000	4,800	4,700	4,200	4,100
125	5,600	7,200	6,000	7,200			125	5,900	5,800	4,600	4,600	4,100	4,100
130	4,900	6,900	5,200	6,800			130	5,600	5,600	4,500	4,500	4,100	4,000
135	4,300	6,500	4,600	6,500			135	5,200	5,300	4,400	4,300	4,000	4,000
140	3,800	6,000					140	4,700	5,100	4,300	4,300	4,000	4,000
145	3,300	5,500					145	4,200	5,000	4,200	4,200	4,000	4,000
150							150	3,700	4,800	4,100	4,100		
155							155	3,300	4,600	3,700	4,000		
160							160	2,900	4,500	3,200	4,000		
165							165	2,600	4,400				
170							170	2,200	4,100				
Telescoping mode	1	2	1	2	1	2	Telescoping mode	1	2	1	2	1	2

B: Load radius in feet


SMART COUNTERWEIGHT

You can increase the capacity by changing the mounting position of the counterweight.

SMART CW 1 status

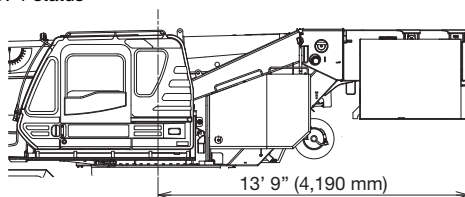

SMART CW 2 status

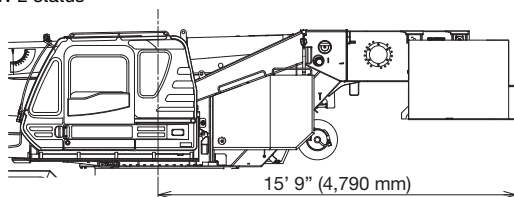

- SMART CW 1: Counterweight is mounted at the front.
- SMART CW 2: Counterweight is mounted at the rear.

WARNING AND OPERATING INSTRUCTIONS FOR LIFTING CAPACITIES

GENERAL

1. RATED LIFTING CAPACITIES apply only to the machine as originally manufactured and normally equipped by TADANO LTD. Modifications to the machine or use of optional equipment other than that specified can result in a reduction of capacity.
2. Hydraulic cranes can be hazardous if improperly operated or maintained. Operation and maintenance of this machine must be in compliance with information, in the Operation Manual supplied with the crane. If this manual is missing, order a replacement through the distributor.
3. The operator and other personnel associated with this machine shall fully acquaint themselves with the latest American National Standards Institute (ANSI) safety standards for cranes.

SET UP

1. Rated lifting capacities on the chart are the maximum allowable crane capacities and are based on the machine standing level on firm supporting surface under ideal job conditions. Depending on the nature of the supporting surface, it may be necessary to have structural supports under the outrigger floats or tires to spread the loads to a larger bearing surface.
2. For outrigger operation, outriggers shall be properly extended with tires free of supporting surface before operating crane.

OPERATION

1. Rated lifting capacities have been tested to and meet minimum requirements of SAE J1063-Cantilevered Boom Crane Structures Method of Test.
Rated lifting capacities do not exceed 85% of the tipping load on outriggers fully extended as determined by SAE J765-Crane Stability Test Code.
2. Rated lifting capacities for partially extended outriggers are determined from the formula, Rated Lifting Capacities = (Tipping Load - $0.1 \times \text{Tip Reaction}$) / 1.25.
3. Rated lifting capacities are based on actual load radius increased by boom deflection.
4. The weight of handling device such as hook blocks, slings, etc., must be considered as part of the load and must be deducted from the lifting capacities.
5. Rated lifting capacities are based on freely suspended loads and make no allowance for such factors as the effect of wind, sudden stopping of loads, supporting surface conditions, inflation of tires, operating speeds, side loads, etc. Side pull on boom or jib is extremely dangerous.
Such action can damage the boom, jib or slewing mechanism, and lead to overturning of the crane.
6. Rated lifting capacities do not account for wind on lifted load or boom. We recommend against working under the condition that the load is out of control due to a strong wind. During boom lift, consider that the rated lifting capacity is reduced by 50% when the wind speed is 20 mph (9 m/s) to 27 mph (12 m/s); reduced by 70% when the wind speed is 27 mph (12 m/s) to 31 mph (14 m/s). If the wind speed is 31 mph (14 m/s) or over, stop operation. During jib lift, stop operation if the wind speed is 20 mph (9 m/s) or over.
7. Rated lifting capacities at load radius shall not be exceeded. Do not tip the crane to determine allowable loads.
8. Do not operate at boom lengths, radii, or boom angle, where no capacities are shown. Crane may overturn without any load on the hook.
9. When boom length is between values listed, refer to the rated lifting capacities of the next longer and next shorter booms for the same radius. The lesser of the two rated lifting capacities shall be used.
10. When making lifts at a load radius not shown, use the next longer radius to determine allowable capacity.
11. Load per line should not exceed 14,600 lbs. (6,600 kg) for main winch and auxiliary winch.
12. Check the actual number of parts of line with LOAD MOMENT INDICATOR (AML-E2) before operation. Maximum lifting capacity is restricted by the number of parts of line of LOAD MOMENT INDICATOR (AML-E2). Limited capacity is as determined from the formula, Single line pull for main winch 14,600 lbs. (6,600 kg) \times number of parts of line.

13. The boom angle before loading should be greater to account for deflection. For rated lifting capacities, the loaded boom angle and the load radius is for reference only.
14. The 42.0' (12.8 m) boom length capacities are based on boom fully retracted. If not fully retracted [less than 57.7' (17.6 m) boom length], use the rated lifting capacities for the 57.7' (17.6 m) boom length.
15. Extension or retraction of the boom with loads may be attempted within the limits of the RATED LIFTING CAPACITIES.
The ability to telescope loads is limited by hydraulic pressure, boom angle, boom length, crane maintenance, etc.
For lifting capacity of single top, deduct the weight of the load handling equipment from the rated lifting capacity of the boom.
16. For the lifting capacity of single top, the net capacity shall not exceed 14,600 lbs. (6,600 kg) including the main boom hook mass attached to the boom.
17. When the base jib or top jib or both jibs are removed, set the jib state switch to the REMOVED position.
18. When erecting and stowing jib, be sure to retain it by hand or by other means to prevent its free movement.
19. Use "ANTI-TWOBLOCK" disable switch when erecting and stowing jib and when stowing hook block. While the switch is pushed, the hoist does not stop, even when overwind condition occurs.
20. When lifting a load by using jib (aux. winch) and boom (main winch) simultaneously, do the following:
• Enter the operation status as jib operation, not as boom operation.
• Before starting operation, make sure that mass of load is within rated lifting capacity for jib.
21. Before telescoping the boom, set the telescoping mode selector switch to mode 1 or mode 2 fully retracted.
A change of the telescoping mode is not permissible when the boom has been partially or fully extended.
22. Crane operation is prohibited without full counterweight 24,700 lbs. (11.2 ton) installed. Outriggers shall be extended 23' 11-3/8" (7.3 m) spread when installing or removing removable counterweight.

DEFINITIONS

1. Load Radius: Horizontal distance from a projection of the axis of rotation to supporting surface before loading to the center of the vertical hoist line or tackle with load applied.
2. Loaded Boom Angle: The angle between the boom base section and the horizontal, after lifting the rated lifting capacity at the load radius.
3. Working Area: Area measured in a circular arc about the centerline of rotation.
4. Freely Suspended Load: Load hanging free with no direct external force applied except by the hoist line.
5. Side Load: Horizontal side force applied to the lifted load either on the ground or in the air.

GR-1000XLL-4 RATED LIFTING CAPACITIES (IN POUNDS)


COUNTERWEIGHT 24,700lbs (11.2 t) ON RUBBER STATIONARY SMART CW1									
Over front					360° Rotation				
B \ A	42.0' (12.8 m)	73.3' (22.4 m)	89.0' (27.1 m)	104.7' (31.9 m)	B \ A	42.0' (12.8 m)	73.3' (22.4 m)	89.0' (27.1 m)	104.7' (31.9 m)
12	65,000				12	43,000			
15	53,700				15	32,600			
20	40,400	33,800	29,700		20	19,400	22,900	22,900	
25	31,400	33,800	29,700	27,700	25	12,500	15,700	16,400	16,800
30	24,200	27,300	27,800	27,700	30	8,100	11,200	11,800	12,200
35		21,200	21,700	22,000	35		8,100	8,700	9,100
40		16,800	17,400	17,800	40		5,800	6,400	6,800
45		13,600	14,200	14,500	45		4,100	4,700	5,100
50		11,100	11,600	12,000	50		2,800	3,400	3,700
55		9,100	9,700	10,000	55		1,700	2,300	2,600
60		7,500	8,000	8,400	60				
65		6,200	6,700	7,100	65				
70			5,600	5,900	70				
75			4,700	5,000	75				
80			3,900	4,200	80				
85				3,400	85				
90				2,800	90				
95				2,300	95				
D	0°				D	0°	29°	43°	50°
Telescoping mode	1, 2	2	2	2	Telescoping mode	1, 2	2	2	2
2nd Boom	0	0	0	0	2nd Boom	0	0	0	0
3rd Boom	0	33	50	67	3rd Boom	0	33	50	67
4th Boom	0	33	50	67	4th Boom	0	33	50	67
Top Boom	0	33	50	67	Top Boom	0	33	50	67

COUNTERWEIGHT 24,700lbs (11.2 t) ON RUBBER STATIONARY SMART CW1									
C \ A	42.0' (12.8 m)		73.3' (22.4 m)		89.0' (27.1 m)		104.7' (31.9 m)		
0°	35.2	18,400	66.1	5,100	81.8	3,300	97.2	2,200	

C \ A	42.0' (12.8 m)					
0°	35.2	5,100				

COUNTERWEIGHT 24,700lbs (11.2 t) ON RUBBER CREEP SMART CW1					
Over front					
B \ A	42.0' (12.8 m)	73.3' (22.4 m)	89.0' (27.1 m)	104.7' (31.9 m)	
12	50,600				
15	41,400				
20	30,400	33,300	29,700		
25	23,200	26,100	26,700	27,000	
30	17,900	20,900	21,500	21,900	
35		17,000	17,600	17,900	
40		13,900	14,500	14,900	
45		11,400	12,000	12,400	
50		9,400	10,000	10,400	
55		7,700	8,300	8,700	
60		6,300	6,900	7,300	
65		5,100	5,700	6,100	
70			4,700	5,000	
75			3,800	4,100	
80			3,000	3,300	
85				2,600	
90				2,000	
95				1,500	
D	0°				
Telescoping mode	1, 2	2	2	2	
2nd Boom	0	0	0	0	
3rd Boom	0	33	50	67	
4th Boom	0	33	50	67	
Top Boom	0	33	50	67	

COUNTERWEIGHT 24,700lbs (11.2 t) ON RUBBER CREEP SMART CW1									
C \ A		42.0'		73.3'		89.0'		104.7'	
		B (12.8 m)		B (22.4 m)		B (27.1 m)		B (31.9 m)	
0°		35.2	13,800	66.1	4,200	81.8	2,400	97.2	1,400



- A: Boom length in feet
- B: Load radius in feet
- C: Loaded boom angle (°)
- D: Minimum boom angle (°) for indicated length (no load)

NOTE: The lifting capacity data stored in the LOAD MOMENT INDICATOR (AML-E2) is based on the standard number of parts of line listed in the chart.
Standard number of parts of line for on-rubber operation should be according to the chart.

Boom length in feet (meters)	42.0' (12.8 m)	42.0' to 104.7' (12.8 m to 31.9 m)	Single top jib
Number of parts of line	6	4	1


GR-1000XLL-4 RATED LIFTING CAPACITIES (IN POUNDS)

COUNTERWEIGHT 24,700lbs (11.2 t) ON RUBBER STATIONARY SMART CW2									
Over front					360° Rotation				
B \ A	42.0' (12.8 m)	73.3' (22.4 m)	89.0' (27.1 m)	104.7' (31.9 m)	B \ A	42.0' (12.8 m)	73.3' (22.4 m)	89.0' (27.1 m)	104.7' (31.9 m)
12	67,600				12				
15	56,000				15				
20	42,300	33,800	29,700		20	21,800			
25	33,000	33,800	29,700	27,700	25	14,200	17,500		
30	25,900	29,000	29,400	27,700	30	9,500	12,600	13,200	13,200
35		22,600	23,000	23,300	35		9,300	9,900	10,300
40		18,000	18,600	18,800	40		6,900	7,500	7,900
45		14,600	15,200	15,500	45		5,000	5,600	6,000
50		12,000	12,500	12,900	50		3,600	4,200	4,600
55		9,900	10,500	10,800	55		2,500	3,000	3,400
60		8,200	8,800	9,100	60		1,500	2,100	2,400
65		6,900	7,400	7,700	65			1,300	
70			6,200	6,500	70				
75			5,200	5,600	75				
80			4,400	4,700	80				
85				3,900	85				
90				3,300	90				
95				2,800	95				
D	0°				D	0°	20°	37°	47°
Telescoping mode	1, 2	2	2	2	Telescoping mode	1, 2	2	2	2
2nd Boom	0	0	0	0	2nd Boom	0	0	0	0
3rd Boom	0	33	50	67	3rd Boom	0	33	50	67
4th Boom	0	33	50	67	4th Boom	0	33	50	67
Top Boom	0	33	50	67	Top Boom	0	33	50	67

COUNTERWEIGHT 24,700lbs (11.2 t) ON RUBBER STATIONARY SMART CW2									
C \ A	42.0' (12.8 m)	73.3' (22.4 m)	89.0' (27.1 m)	104.7' (31.9 m)	C \ A	42.0' (12.8 m)			
0°	35.2	19,900	66.1	5,700	0°	35.2	6,200		
			81.8	3,700					
				97.2					
				2,600					

COUNTERWEIGHT 24,700lbs (11.2 t) ON RUBBER CREEP SMART CW2									
Over front									
B \ A	42.0' (12.8 m)	73.3' (22.4 m)	89.0' (27.1 m)	104.7' (31.9 m)					
12	53,300								
15	43,600								
20	32,300	33,800	29,700						
25	24,800	27,600	28,200	27,700					
30	19,300	22,300	22,900	23,200					
35		18,100	18,700	19,100					
40		14,900	15,500	15,900					
45		12,300	12,900	13,300					
50		10,200	10,800	11,200					
55		8,500	9,100	9,500					
60		7,000	7,600	8,000					
65		5,800	6,400	6,800					
70			5,300	5,700					
75			4,400	4,700					
80			3,600	3,900					
85				3,200					
90				2,500					
95				2,000					
D	0°								
Telescoping mode	1, 2	2	2	2					
2nd Boom	0	0	0	0					
3rd Boom	0	33	50	67					
4th Boom	0	33	50	67					
Top Boom	0	33	50	67					

COUNTERWEIGHT 24,700lbs (11.2 t) ON RUBBER CREEP SMART CW2									
C \ A	42.0' (12.8 m)	73.3' (22.4 m)	89.0' (27.1 m)	104.7' (31.9 m)					
0°	35.2	14,700	66.1	4,800					
			81.8	3,000					
				97.2					
				1,900					



- A: Boom length in feet
B: Load radius in feet
C: Loaded boom angle (°)
D: Minimum boom angle (°) for indicated length (no load)

NOTE: The lifting capacity data stored in the LOAD MOMENT INDICATOR (AML-E2) is based on the standard number of parts of line listed in the chart.
Standard number of parts of line for on-rubber operation should be according to the chart.

Boom length in feet (meters)	42.0' (12.8 m)	42.0' to 104.7' (12.8 m to 31.9 m)	Single top jib
Number of parts of line	6	4	1

WARNING AND OPERATING INSTRUCTIONS FOR ON RUBBER LIFTING CAPACITIES

1. Rated lifting capacities on-rubber are in pounds and do not exceed 75% of tipping loads as determined by SAE J765-Crane Stability Test Code.
2. Rated lifting capacities shown in the chart are based on condition that crane is set on firm level surfaces with suspension-lock applied. They are based on actual load radius increased by tire deformation and boom deflection.
3. If the suspension-lock cylinders contain air, the axle will not be locked completely and rated lifting capacities may not be obtainable. Bleed the cylinders according to the operation safety and maintenance manual.
4. Rated lifting capacities are based on proper tire inflation, capacity and condition. Damaged tires are hazardous to safe operation of crane.
5. Tires shall be inflated to correct air pressure.
6. Over front operation shall be performed within 2 degrees in front of chassis.
7. On-rubber lifting with "jib" is not permitted. Maximum permissible boom length is 104.7 ft. (31.9 m).
8. When making lift on-rubber stationary, set parking brake.
9. For creep operation, boom must be centered over front of machine, slewing lock engaged, and load restrained from slewing. Travel slowly and keep the lifted load as close to the ground as possible, and especially avoid any abrupt steering, accelerating or braking.
10. Do not operate the crane while carrying the load.
11. Creep is motion for crane not to travel more than 200 ft. (60 m) in any 30 minute period and to travel at the speed of less than 1 mph (1.6 km/h).
12. For creep operation, choose the drive mode and proper gear according to the road or working condition.

Tires	Air Pressure
29.5-25 36PR	68 psi. (470 kPa)
29.5-25 40PR	67 psi. (465 kPa)

NOTES FOR LOAD MOMENT INDICATOR (AML-E2)

1. Set AML select keys in accordance with the actually operating crane conditions and don't fail to make sure, before crane operation, that the displays on front panel are correct.
2. When operating crane on outriggers:
 - Set "P.T.O." switch to "ON".
 - Press the outrigger state select key to register for the outrigger operation. If the display agrees with the actual state, press the set key to register. After the completion of the registration, the display returns to the crane operation status.
 - Press the lift state select key to register the lift state to be used (single top/jib/boom).
 - Each time the lift state select key is pressed, the display changes. If the display agrees with the actual state, press the set key to register. After the completion of the registration, the display returns to the crane operation status.
 - When erecting and stowing jib, select the status of jib set (Jib state indicative symbol lights up).
3. When operating crane on-rubber:
 - Set "P.T.O." switch to "ON".
 - Press the outrigger state select key to register for the on-rubber operation. Each time the outrigger state select key is pressed, the display changes. Select the creep operation, the on-rubber state indicator symbol lights up.
 - Press the lift state select key to register the lift state. However, pay attention to the following.
 - (1) For stationary operation.
 - The front capacities are attainable only when the over front position symbol comes on.
 - When the boom is more than 2 degrees from centered over front of chassis, 360° capacities are in effect.
 - When a load is lifted in the front position and then slewed to the side area, make sure the value of the LOAD MOMENT INDICATOR (AML-E2) is below the 360° lifting capacity.
- (2) For creep operation.
 - The creep capacities are attainable only when boom is in the straight forward position of chassis and the over front position symbol is on. If boom is not in the straight forward position of chassis, never lift load.
4. This machine is equipped with an automatic slewing stopping device. (For the details, see Operation Manual.) But, operate very carefully because the automatic slewing stop does not work in the following cases.
 - During on-rubber operation.
 - When the "P.T.O." switch is set to "OVERRIDE" and the "OVERRIDE" key switch outside the cab is on.
5. During crane operation, make sure that the displays on front panel are in accordance with actual operating conditions.
6. The displayed values of LOAD MOMENT INDICATOR (AML-E2) are based on freely suspended loads and make no allowance for such factors as the effect of wind, sudden stopping of loads, supporting surface conditions, inflation of tire, operating speed, side loads, etc.
For safe operation, it is recommended when extending and lowering boom or slewing, lifting loads shall be appropriately reduced.
7. LOAD MOMENT INDICATOR (AML-E2) is intended as an aid to the operator. Under no condition should it be relied upon to replace use of capacity charts and operating instruction. Sole reliance upon LOAD MOMENT INDICATOR (AML-E2) aids in place of good operating practice can cause an accident. The operator must exercise caution to assure safety.
8. The lifting capacity differs depending on the outrigger extension width and slewing position.
Work with the capacity corresponding to the outrigger extension width and slewing position.
For the relationship among the outrigger extension width, slewing position and lifting capacities, refer to the working area charts.

GR-1000XLL-4 AXLE WEIGHT DISTRIBUTION CHART

		Pounds			Kilograms		
		GVW	Front	Rear	GVW	Front	Rear
Base machine		123,550	61,600	61,950	56,040	27,940	28,100
Remove:	1. 7.3 ton (6.6 metric ton) hook block	-360	-550	190	-165	-251	86
	2. 100 ton (90.7 metric ton) hook block	-1,900	-3,460	1,590	-850	-1,571	721
	3. Top jib	-740	-1,180	440	-336	-534	198
	4. Base jib	-1,910	-4,160	2,250	-867	-1,886	1,019
	5. Removable Counterweight	-24,700	9,470	-34,160	-11,200	4,296	-15,496

[illegible]

This image shows a full page of white paper with horizontal black ruling lines. The word "MEMO" is printed in large, bold, black capital letters at the top left corner. The rest of the page is filled with evenly spaced horizontal lines, typical of a notebook or memo pad.



TADANO AMERICA CORPORATION

4242 West Greens Road.
Houston, Texas, 77066 U.S.A.
PHONE: (281) 869-0030
FAX: (281) 869-0040
<http://www.tadanoamerica.com>