


(i) Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage - советоватьсья

\* Draft version.



**DIN/FEM**   
EN 14439-FEM 1005- C25




EKO Power Control

Remote Assistance


Zoning


Anti-Collision


Operator Access





Curvas de cargas - Load diagrams - Lastkurven - Courbes de charges - Curve di carico - График грузоподъёмности


	SL	◀ ■ ■ ▶														m		
		20	20,8	25	30	35	37,5	40,9	45	50	55	60	65	70	75		80	Kg
		50000	50000	40127	32375	26931	25000	25000	22356	19872	17854	16177	14769	13559	12524		11613	
		19,3	20	25	30	34,6	37,7	40	45	50	55	60	65	70	75		80	
50000	47631	36639	29498	25000	25000	23329	20452	18154	16301	14759	13455	12348	11395	10557	Kg			


	SL	◀ ■ ▶														m	
		20	22	25	30	35	39,7	43,4	45	50	55	60	65	70	75		Kg
		50000	50000	42911	34673	28887	25000	25000	23898	21259	19106	17326	15825	14542	13434		
		20	20,4	25	30	33	36,6	40	45	50	55	60	65	70	75		
50000	50000	39133	31557	28162	25000	25000	21828	19406	17429	15794	14407	13227	12213	Kg			


	SL	◀ ■ ▶														m
		20	23,5	25	30	35	38	42,1	46,1	50	55	60	65	70	Kg	
		50000	50000	45902	37136	30988	28111	25000	25000	22749	20452	18558	16964	15597		
		20	21,5	25	30	35	38,8	42,4	45	50	55	60	65	70		
50000	50000	41814	33772	28131	25000	25000	22834	20741	18640	16902	15432	14180	Kg			


	SL	◀ ■ ▶														m
		20	24,3	25	30	35	38	44,1	48,2	50	55	60	65	Kg		
		50000	50000	48272	39092	32654	29642	25000	25000	23940	21538	19551	17874			
		20	22,5	25	30	33	35	40,6	44,4	50	55	60	65			
50000	50000	43946	35521	31754	29622	25000	25000	21807	19613	17781	16250	Kg				

	SL	◀ ■ ▶														m
		20	24,9	28	30	35	38	45,2	49,6	50	55	60	Kg			
		50000	50000	43594	40251	33638	30543	25000	25000	24664	22201	20151				
		20	23	28	30	33	35	41,6	45,5	50	55	60				
50000	50000	39609	36546	32685	30491	25000	25000	22460	20193	18320	Kg					

	SL	◀ ■ ▶														m
		20	25,5	28	30	35	40	46,2	50	52,5	55	Kg				
		50000	50000	44660	41245	34486	29477	25000	25000	23500	22770					
		20	23,5	28	30	33	35	42,4	46,6	50	55					
50000	50000	40551	37415	33472	31226	25000	25000	23018	20700	Kg						

	SL	◀ ■ ▶														m
		20	25,6	28	30	35	40	45	46,1	50	Kg					
		50000	50000	44526	41121	34383	29394	25793	25000	25000						
		20	23,4	28	30	33	35	42,3	46,5	50						
50000	50000	40406	37281	33348	31112	25000	25000	25000	Kg							

	SL	◀ ■ ▶														m
		20	26,2	28	30	35	40	44,1	Kg							
		50000	50000	49732	43636	34838	29394	25841								
		20	23,2	28	30	35	41,8	45								
50000	50000	39889	36805	30708	25000	25000	Kg									




	SL	◀ ■ ▶														m
		20	25,5	28	30	34,1	Kg									
		50000	50000	45054	41607	35863										
		20	23,4	28	30	34,1										
50000	50000	41038	37881	32603	Kg											





SL-SUPERLIFT Otras velocidades y características de funcionamiento – Variant speeds and service conditions –  
 Abweichende Geschwindigkeiten und Betriebsbedingungen – Vitesses et conditions de fonctionnement différentes  
 – Differenti velocità e condizioni di funzionamento – Нестандартные скорости и условия эксплуатации





\* Draft version.

## Mecanismos - Mechanisms - Antriebe - Mécanismes - Meccanismi - Приводы



165 Hp (123Kw) - INV - 5V  
400V / 480V - 50/60 HZ

												
	660 m	m/min	0-15	0-26	0-52	0-100	0-124	0-7,5	0-13	0-26	0-50	0-62
		Kg	25000	25000	12500	7500	500	50000	50000	25000	15000	1000
		Kw	123	123	123	123	123	123	123	123	123	123

	m/min	15 / 45 / 75		
	Kw	11		
	r.p.m.	0,3	0,6	0,7
	Kw	4 x 7,5		
	m/min	12 / 24		
	Nm	4 x 80		

- \* Opcional / Optional / Opzionale
-  Elevación / Hoisting / Heben / Levage / Sollevamento
-  Distribución / Trolleying / Katzfahren / Distribution / Distributions
-  Orientación / Slewing / Schwenken / Orientation / Rotazione
-  Traslacion / Travelling / Schienenfahren / Translation / Traslazione
-  Cable / Rope / Seil / Câble / Fune


165Hp (123Kw) - INV

		400V 50Hz	Imax.= 485A	Fuse= 500A	TOTAL POWER	GENERATOR	100m	150m	200m
2000/14/CEE 2005/88/CEE	2006/95 /CEE	480V 60Hz	Imax.= 400A	Fuse = 500A	315 KVA	500 KVA	6PX120+GND	6PX120+GND	6PX120+GND

\* Draft version.

Montaje - Erection - Montage - Montage - Montaggio

STL

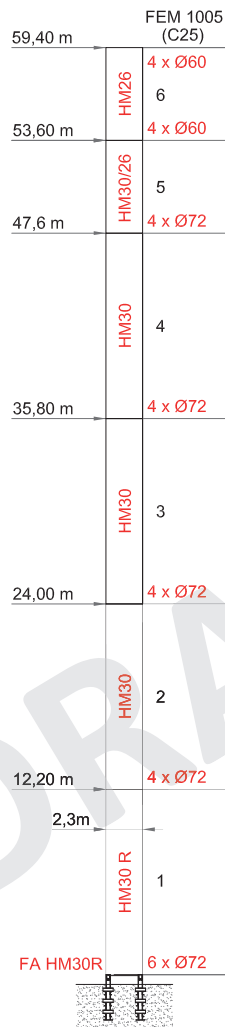


C

HM26:	HEM2623.1660
HM30/26:	HM3023.6.1672.1660
HM30:	HM3023.1672
HM30R:	HM3023R.2472.1672
FA HM30:	HM3023.472
FA HM30 R:	HM3023.672

## Proceso de trepado - External climbing - Kletterkrane - Telescopable - Sopralzo idraulico - Процесс наращивания крана


TREPADO EXTERNO / EXTERNAL CLIMBING / GEANKERTER KRAN /  
GRUE ANDRÉE / GRU ANCORATA / ВОСХОЖДЕНИЕ ЭКСТЕРНО

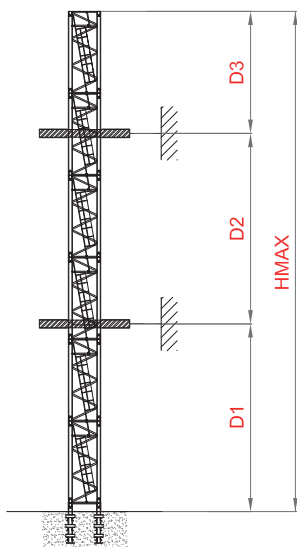

HM30

▲▲▲▲▲▲	D1 min/max	D2 min/max	D3 max	H max
30m	48m/54m	30m/36m	48	140
35m	48m/54m	30m/36m	48	140
40m	43m/49m	30m/36m	40	130
45m	43m/49m	30m/36m	40	130
50m	36m/42m	24m/30m	36	96
55m	36m/42m	24m/30m	36	96
60m	36m/42m	24m/30m	36	96
65m	24m/30m	18m/24m	36	80
70m	24m/30m	18m/24m	36	80

TREPADO INTERNO / BOTTOM CLIMBING CRANE / KLETTERRANE IM GEBÄUDE / TÉLESCOPAGE SUR DALLES /  
GRU CLIMBING / ВНУТРЕННИЙ ПРОЦЕСС ТЕЛЕСКОПИРОВАНИЯ

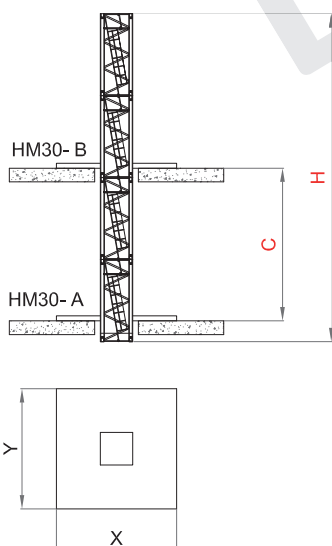

HM30

▲▲▲▲▲▲	C (m)	H (m)
30m	18	63
	21	63
	24	63
35m 40m 45m	16	60
	18	60
	21	60
50m 55m 60m	15	51
	16	51
	18	51
65m 70m	15	42
	16	42
	18	42
X (m)	3	
Y (m)	2,5	

❗ Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage- Другие высоты подъема и наращивание крана по запросу

\* Draft version.